

FAN COIL UNIT

- > The expert of Fan coil unit.....
- > The expert of OEM/ODM manufacturer.....
- >>



The expert of cassette type air conditioner/FCU
The expert of OEM/ODM manufacturer

➤ INSTRUCTION of MECO

Established in 2007, Taizhou MECO Refrigeration Equipment Co., Ltd is a manufacturer which has comprehensive competitiveness in the technology, producing and services of commercial air conditioner.

MECO is located in Taizhou City, Zhejiang, China, with about 13,000 square meters plant. We have 3 sets of automatic air conditioning assembly lines, matched high-performance enthalpy difference test lab, water-cooled performance test station, air-conditioning inspection and other testing equipments, and also 70 sets of accessory machining equipments.

MECO focus on the producing of fan coil unit, Our products include cassette fan coil (1-way, 4-way, 8-way style), Ultra thin vertical fan coil, Universal fan coil, high wall mounted FCU, etc. we produce almost all kind of fan coil which is popular in the field.

Focus on high quality product, we are doing OEM for more than 100 famous central air conditioner enterprises in China and over the world. At the same time, our products with MECO marks was sold successfully to more than 30 countries and regions, including the EU, South America, Middle East, Southeast Asia etc.



May 2007, the company started to produce cassette-type fan coil and cassette air conditioner;

November 2008, the company got the production permit of FCU;

December 2009, the company successfully passed the ISO9001: 2008 quality certification;

March 2010, MECO start to produce the new version (5th) cassette type fan coil;

May, 2011, MECO start to produce universal fan coil;

April, 2012, MECO start to produce the cassette FCU with DC motor;

December, 2014, MECO design and produce the ultra thin FCU (130mm thickness) with both DC and AC motor,

September, 2016, M style cassette FCU was successful trial production;

April, 2017, thin style ceiling conceal duct fan coil (200mm) put into market;

August, 2018, MECO start the producing of B style ceiling conceal duct fan FCU (7mm coil and higher performance);

March, 2019, E style ultra thin ceiling duct fan coil (200mm) put into market, all FCU series finish the DC motor design;

January, 2021, MECO got the title of national high tech enterprise of China;

September, 2021, MECO moved the factory to build up a bigger R&D and manufacturing platform;

Nowadays, we are doing our best to build a outstanding brand in China. We will keep focusing on the development strategy of "differences in development", continue to adhering to the management concept of "keep improvement, innovation forever", and constantly reinforce the product quality, creating a new prospect.





Enterprise culture of MECO

Enterprise spirit:

trustworthy,enterprising,created,harmonious

Operating conception:

differences in development strategy-professional, dedicated,expert

Management conception:

keep improvement, innovation forever

Service conception:

Customer's trifle is Mecos event.

Meco's vision,mission and core value

Vision: Become a reliable partner

Mission:pursuing perfect products,supplying professional service

Core value:

Loyal&harmonious、diligent&enterprising

Quality first、customer satisfaction

Trustworthy operating、win-win transaction

Loving our work、exploiting innovation

Meco's core competence

Credibility, cohesion, rapid response, learning ability, creativity



CONTENTS

[Http://www.china-meco.com](http://www.china-meco.com)

>> >

Instruction of MECO	1
Enterprise culture	2
Products list of MECO	4
Cassette type fan coil unit	6
1-way cassette type fan coil unit	7
4-way cassette type fan coil unit (drained pump inside) M style	10
Surround air flowing type fan coil (G style)	14
Decorative 4-side air flowing type fan coil unit	17
high wall mounted type fan coil unit	21
Ceiling floor type fan coil unit	23
Ceiling conceal ducted type fan coil unit	26
K style slim ceiling conceal ducted type fan coil unit	30
Slim ceiling conceal ducted type fan coil unit	32
Medium static pressure ducted type fan coil unit	34
High static pressure ducted type fan coil unit	37
High static pressure ducted type fan coil unit (HAW series)	40
Universal type fan coil unit	42
Ultra thin vertical type fan coil unit	45
Slim ducted type fan coil unit	48
Vertical ducted conceal type fan coil unit	50
DC brushless motor type fan coil unit	52
DC3 style fan coil unit	53
DCV style fan coil unit	54


Products list of Mecro

Fan coil unit


Type	Model	m ³ /h	340	510	680	800	850	1020	1360	1530	1700	2040	2380	2720	3060	3400	4080	DC motor (0-10V)	DC motor (3 speed)
		cfm	200	300	400	470	500	600	800	900	1000	1200	1400	1600	1800	2000	2400	optional	
Cassette type	1-way with drained pump		✓	✓	✓		✓												●
	4-way without drained pump (M style)		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓					●	●
	4-way with drained pump (M style)		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				●	●
	surround air flowing style (G style)						✓	✓	✓		✓	✓	✓						●
Decorative 4-side air flowing type	4-side air flowing with drained pump (F style)				✓		✓							✓	✓				●
	4-side air flowing drained by nature (F style)				✓		✓							✓	✓				●
High wall mounted type	standard type		✓	✓	✓		✓	✓	✓										
Ceiling & floor type	Standard type			✓	✓		✓	✓	✓		✓	✓	✓						
Ceiling conceal ducted type	12/30/50/65Pa		✓	✓	✓		✓	✓	✓		✓	✓	✓					●	●
Ceiling conceal ducted type slim style-E style	12Pa			✓	✓	✓	✓	✓	✓	✓								●	●
Ceiling conceal ducted type slim style-K style	12/30Pa		✓	✓	✓		✓	✓	✓		✓								●
Medium static pressure ducted type (MAW series)	75Pa							✓	✓		✓	✓	✓	✓				●	
high static pressure ducted type	120Pa										✓	✓	✓					●	
high static pressure ducted type (HAW series)	120Pa								✓		✓	✓	✓	✓	✓	✓	✓	●	
Universal type (with casing)	12/30/50Pa		✓	✓	✓		✓	✓	✓		✓	✓	✓					●	●
Universal conceal type (without casing)	12/30/50Pa		✓	✓	✓		✓	✓	✓		✓	✓	✓					●	●
Vertical ducted type	60Pa							✓	✓		✓	✓						●	

Type	Model	m ³ /h	300	400	500	600	DC motor (0-10V)	DC motor (3 speed)
Ultra thin vertical fan coil unit (with casing)			✓	✓	✓	✓	●	
Ultra thin vertical conceal fan coil unit (without casing)			✓	✓	✓	✓	●	●

FCU types

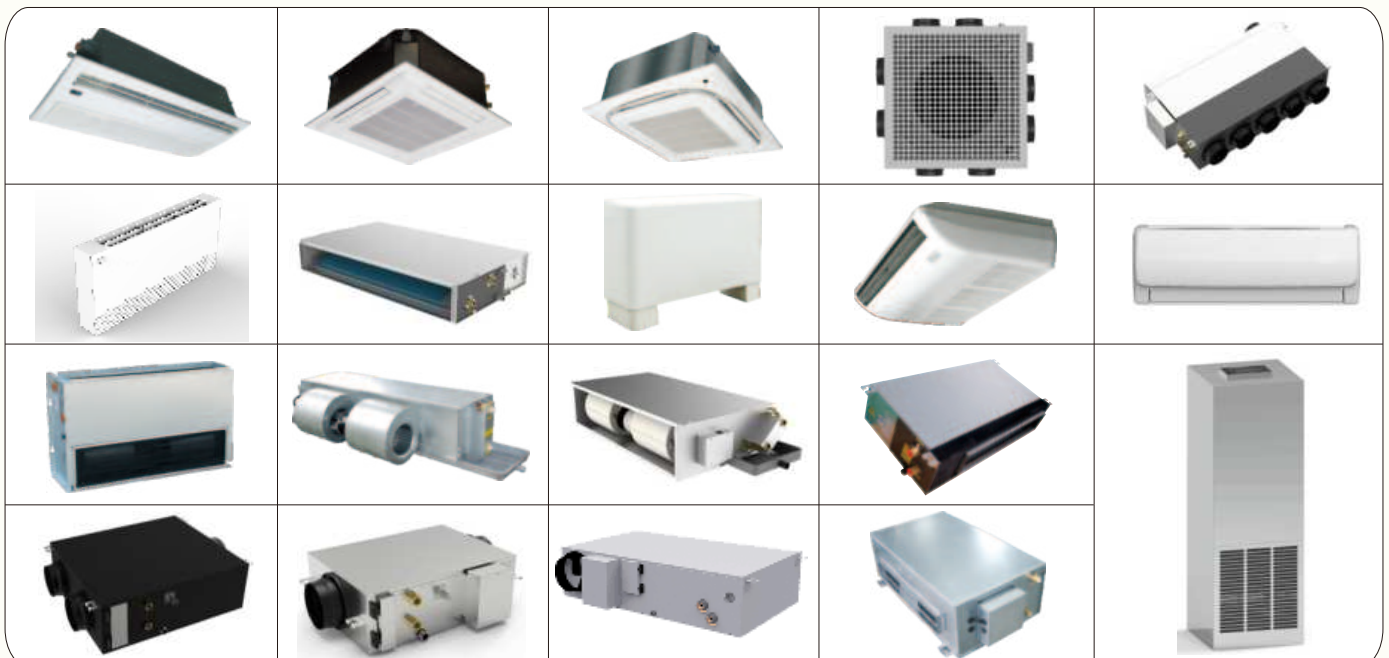

Model naming of FCU

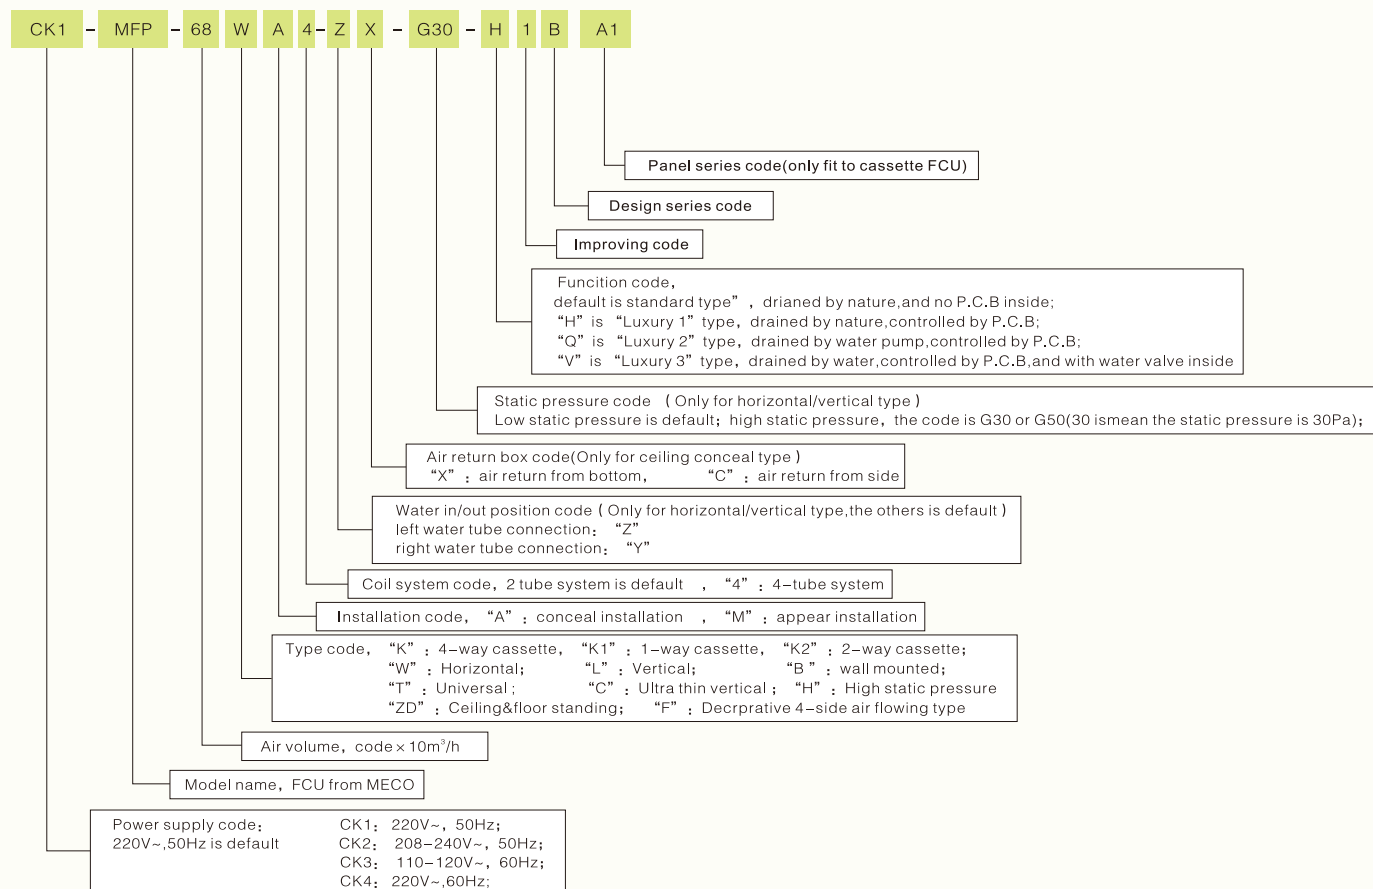

Testing condition

2-tube system

1. cooling testing condition:

Entering air temperature: Dry bulb 27°C, Wet bulb 19.5°C

Entering/out water temperature: 7°C/ 12°C

Heating

Entering air temperature: 21°C

Entering water temperature: 60°C, Same water flow rate as for the cooling.

4-tube system

Cooling

Entering air temperature: Dry bulb 27°C, Wet bulb 19.5°C

Entering/out water temperature: 7°C/ 12°C

Heating

Entering air temperature: 21°C

Entering/out water temperature: 60°C/ 50°C

Cassette type fan coil unit





1-way cassette type fan coil unit

Characteristic

1、1-way air flowing, which is easy to be installed in the side of ceiling

2、Thin design unit which can be installed in a limit ceiling (the thickness of unit is only 235mm)




3、Remote controller is standard and wire controller is optional



4、Auto swing, Wide air flowing range

Wide air flowing range, the Max. height of space can be 3.5m, the flowing angle is Max. 50 degrees

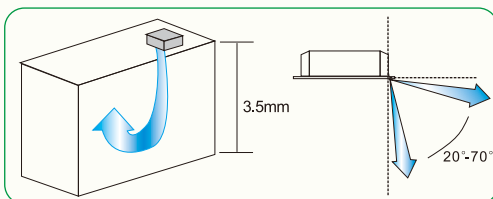


5、The wind guide bar of horizontal can be changed by manual.




6、Quiet running


Double fan structure installed symmetrically, the unit running more stable

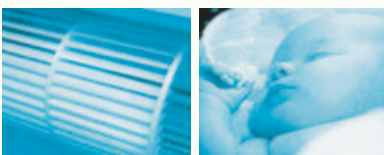

7、High lift water drained pump (750mm), easy to plan the condensate drained pipe

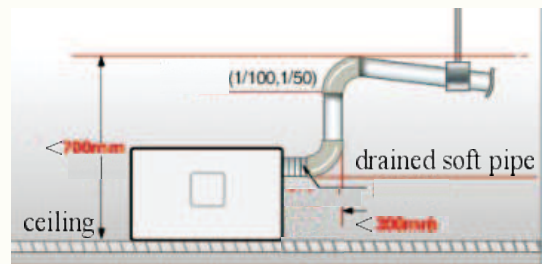


8、Float switch inside to prevent from leaking



After the water raising to a certainly position, the float switch will act and alarm, then the unit will cut off the water valve or stop the fan motor.


9、Fresh air can be input from outside



Fresh air can be input
The unit offer a connection to input fresh air from outside, will be improve the indoor environment

10、Easy to be installed, Low installation cost

Comparing to the ceiling conceal ducted FCU, we do not need to install the air inlet and outlet, and also the ducted connection and insulation.




11、Fan and Fan motor is easy to maintain

12、Easily interfaced with most widely used Mod-bus and proprietary supervisory system based on Mod-Bus protocol.




13、Left /right water tube connection can be selected



For example, when the FCU is used in hotel, we can select a correct pipe connection in order to reduce the job of water pipe installation, and also reduce the space demand for the pipe installing.

14、Negative ion generator is optional



Negative ion generator is optional to clean the air in a room.

15、4-tube system is optional




There are both cooling and heating water circle coil inside the unit, so the unit can deal with cooling or heating at the same time.
4pipe systme is always used in the place where need to deal with heating and cooling by refrigeration system at the same time, For example, a room need heating and another need cooling.
5-star hotel always use this kinds FCU.

16、Water valve can be installed inside the unit.


Water valve is used to control the on/off water flowing to the unit, we installed the valve into the unit, so the user do not need to installed it by themself.

► Installing dimension

Left side water connection

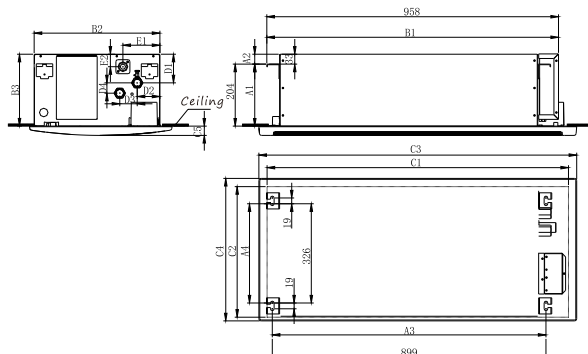

Right side water connection

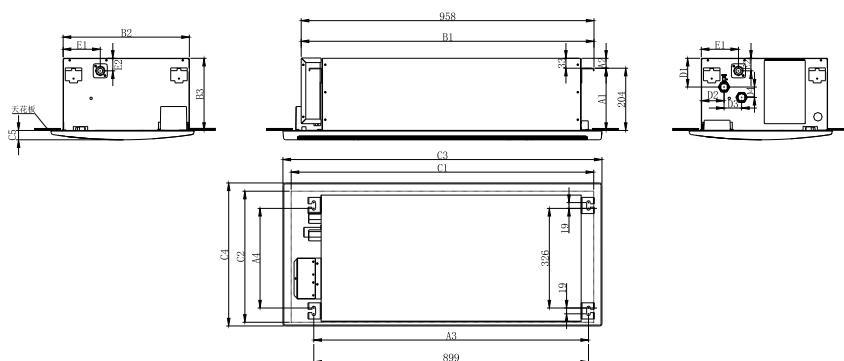

Model	Annotation	Units	MFP-34KIM-Q2A1
			MFP-51KIM-Q2A1
			MFP-68KIM-Q2A1
			MFP-85KIM-Q2A1
distance from hook to ceiling	A1	(mm)	205-210
distance from hook to top of unit	A2	(mm)	31
hooks distance 1	A3	(mm)	899
hooks distance 2	A4	(mm)	326
length of unit	B1	(mm)	958
width of unit	B2	(mm)	413
thickness of unit	B3	(mm)	236
length of opening of ceiling	C1	(mm)	990
width of opening of ceiling	C2	(mm)	426
length of panel	C3	(mm)	1044
width of panel	C4	(mm)	468
thickness of panel	C5	(mm)	31
water pipe position 1	D1	(mm)	94
water pipe position 2	D2	(mm)	74
water pipe position 3	D3	(mm)	57
water pipe position 4	D4	(mm)	34
water drained pipe position 1	E1	(mm)	122
water drained pipe position 2	E2	(mm)	41

Model	Annotation	Units	MFP-34KIM-Q2A1
			MFP-51KIM-Q2A1
			MFP-68KIM-Q2A1
			MFP-85KIM-Q2A1
distance from hook to ceiling	A1	(mm)	205-210
distance from hook to top of unit	A2	(mm)	31
hooks distance 1	A3	(mm)	899
hooks distance 2	A4	(mm)	326
length of unit	B1	(mm)	958
width of unit	B2	(mm)	413
thickness of unit	B3	(mm)	236
length of opening of ceiling	C1	(mm)	990
width of opening of ceiling	C2	(mm)	426
length of panel	C3	(mm)	1044
width of panel	C4	(mm)	468
thickness of panel	C5	(mm)	31
water pipe position 1	D1	(mm)	80
water pipe position 2	D2	(mm)	116
water pipe position 3	D3	(mm)	26
water pipe position 4	D4	(mm)	61
water drained pipe position 1	E1	(mm)	122
water drained pipe position 2	E2	(mm)	41



MECO

CASSETTE TYPE FAN COIL UNIT

Model (2 –tube system)			MFP-34K1M-Q1AA1	MFP-51K1M-Q1AA1	MFP-68K1M-Q1AA1	MFP-85K1M-Q1AA1	
Model of unit			MFP-34K1M-Q1A1	MFP-51K1M-Q1A1	MFP-68K1M-Q1A1	MFP-85K1M-Q1A1	
Panel Type			MB-SA11A1				
Power supply			220V,50Hz,1Ph				
Air volume	H	m³/h	340	510	680	850	
	M		280	380	515	660	
	L		180	260	340	430	
Static pressure		Pa	0	0	0	0	
Cooling capacity	TH	H	W	1800	2700	3600	4500
			BTU/h	6142	9212	12283	15354
	SH		W	1300	1970	2700	3185
			BTU/h	4436	6722	9212	10867
	TH	M	W	1500	2460	3000	3715
			SH	W	1000	1555	1995
	TH	L	W	1390	2057	2479	2920
			SH	W	823	1200	1530
Heating capacity	H		W	2700	4050	5400	6750
	M		W	1950	2770	3935	4900
	L		W	1290	1774	2800	3505
Noise		High speed	dB(A)	43	45	46	47
Power input		High speed	W	37	50	62	73
Waterflow volume		High speed	m³/h	0.31	0.46	0.62	0.77
Pressure dropping			kPa	16	18	20	22
Water tube connection(inlet)				ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"
Water tube connection(outlet)				ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"
Coil		Type	Hydrophilic aluminum fin to wear copper tube				
Max.working pressure			MPa	1.6	1.6	1.6	1.6
Condensing water pipe			mm	φ 26	φ 26	φ 26	φ 26
Net dimension	Unit	L × W × H	mm	958 × 413 × 236	958 × 413 × 236	958 × 413 × 236	958 × 413 × 236
	Panel			1044 × 468 × 31			
Net weight	Unit	kg		19.4	19.4	20.5	20.5
	Panel	kg		4			

1 –way cassette FCU performance
(2 tube system)

1-way cassette FCU performance
(2 tube system)

Mode(4-tube system)I				MFP-34K1M4-Q1AA1	MFP-51K1M4-Q1AA1	MFP-68K1M4-Q1AA1	MFP-85K1M4-Q1AA1	
Model of unit				MFP-34K1M4-Q1A1	MFP-51K1M4-Q1A1	MFP-68K1M4-Q1A1	MFP-85K1M4-Q1A1	
Panel Type				MB-SA11A1				
Power supply				220V,50Hz,1Ph				
Air volume		H	m³/h	340	510	680	850	
		M		280	380	515	660	
		L		180	260	340	430	
Static pressure			Pa	0	0	0	0	
Cooling capacity	TH	H	W	1350	2030	2700	3380	
			BTU/h	4606	6926	9212	11533	
	SH		W	1000	1520	2080	2450	
			BTU/h	3412	5186	7097	8359	
	TH	M	W	1130	1850	2250	2790	
			W	770	1200	1540	1860	
	SH	L	W	1040	1540	1860	2190	
			W	630	920	1180	1410	
Heating capacity	H		W	1080	1620	2160	2700	
	M		W	780	1108	1574	1960	
	L		W	516	710	1120	1402	
Noise	High speed		dB(A)	43	45	46	47	
Power input		High speed		W	37	50	62	73
Waterflow volume	High speed	Cooling coil	m³/h	0.23	0.35	0.46	0.58	
		Heating coil		0.09	0.14	0.19	0.23	
Pressure dropping	Cooling tube		kPa	20	20	20	20	
	Heating tube			10	10	10	10	
Water tube connection(inlet)		Cooling/heating tube		ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Water tube connection(outlet)		Cooling/heating tube		ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2'	
Exchanger			Type	Hydrophilic aluminum fin to wear copper tube				
Max.working pressure			MPa	1.6	1.6	1.6	1.6	
Condensing water pipe			mm	φ 26	φ 26	φ 26	φ 26	
Net dimension	Unit	L × W × H	mm	958 × 413 × 236	958 × 413 × 236	958 × 413 × 236	958 × 413 × 236	
	Panel			1044 × 468 × 31				
Net weight	Unit	kg	21	21	22	22		
	Panel	kg	4					


1-way cassette FCU performance
(4 tube system)

1-way cassette FCU performance
(4 tube system)





Characteristic


- 1、4-way air flowing, which can uniform temperature distribution in the room



- 2、Specially design to avoid the air-short flowing;
3、Thin design unit which can be installed in a limit ceiling (the Min. thickness is 240mm)
4、Easy to be installed, Low installation cost
- Comparing to the ceiling conceal ducted FCU, we do not need to install the air inlet and outlet, and also the ducted connection and insulation.



- 5、Remote controller is standard and wire controller is optional



- 6、Auto swing


Using advanced 3D software to design the centrifugal fan with streamline and big diameter turbine.

- 7、Quiet running




The efficiency of airflow rate, heavy wind volume and low noise is excellent. Because the ventilator wheel is processed to sine strip seam, which enhances its flexibility, and drops the vibration of ventilator during revolving in large scale, simultaneously reduced the motor noise caused by ventilator swinging.

- 8、High lift water drained pump (750mm), easy to plan the condensate drained pipe

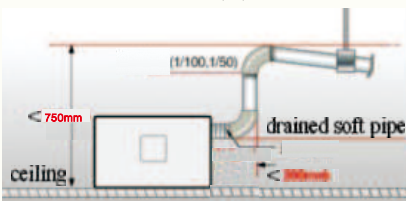

- 9、Float switch inside to prevent from leaking




After the water raising to a certainly position, the float switch will act and alarm, then the unit will cut off the water valve or stop the fan motor.


- 10、Fresh air can be inputed from outside

Fresh air inlet can import some fresh wind from outside, and ensure the quality of indoor air.

Thus, the consumer can share the fresh and clean air to lessen illness caused by air condition.



- The unit offer a connection to input fresh air from outside, will be improve the indoor environment
- Auxiliary duct To send part of air to other place



- 11、Auxiliary duct is available to send part of air to other place, in order to improve indoor temperature and air quality

- 12、“C” type heat exchanger, blue fin

“C” type exchanger is helpful to improve the well-distributed of terminal air duct and refrigerate system, make the efficiency of multi flow more even and it reduced the probable of system leak.

Blue fin extremely reduced the coagulate water detained in the aluminum flake, so it reduce the wind resistance, improved the efficiency of heat exchanger.




- 13、The water remain in the tray is easy to drained by manual.

There are a rubber plug on the water collecting tray,we can drained out the dirty water by manual.
Because the water remained inside the tray will keep for a long time, then there will be very dirty and there might be lots bacterial inside too,draining out the dirty water is benifit to the health and also reduce the possible of pump blocking.

- 14、 Square panels ,which can choose the direction of inlet/outlet water connection freely


- 15、 Fan and fan motor is easy to maintain

After take out the air grid of the panel,we can easily take out the eletric box,then the fan



- 16、 The dimension of M1 unit is only 590×590mm, which can be installed in a standard ceiling opening.

- 17、 Easily interfaced with most widely used BMS and proprietary supervisory system based on Mod- Bus protocol.



- 18、 Water valve can be installed outside the unit(optional).

Water valve is used to controll the on/off water flowing to the unit,we installed the valve outside the unit ,so the user do not need to installed it by themself.

- 19、 4-tube system is optional

There are both cooling and heating water circle coil inside the unit,so the unit can deal with cooling or heating at the same time.
4pipe systme is always used in the place where need to deal with heating and cooling by refrigeration system at the same time.For example, a room need heating and another need cooling. 5-star hotel always use this kinds FCU.



Dc motor is optional

Excellent performance——

Optional brushless DC motor, high efficiency and energy saving

Wolong/Panasonic brushless plastic package DC motor is optional.

High working efficiency, but energy efficiency is over 50% lower than the average motor.

Long working life:

With plastic package, the humidity and dust will not easily access to the inner motor.

High electrical efficiency, low temperature rise and slow aging of internal components.

More controller is optional:


0-10V stepless thermostat is default optional,
3 speed thermostat can be customized;



0-10V
thermostat



3 speed
thermostat

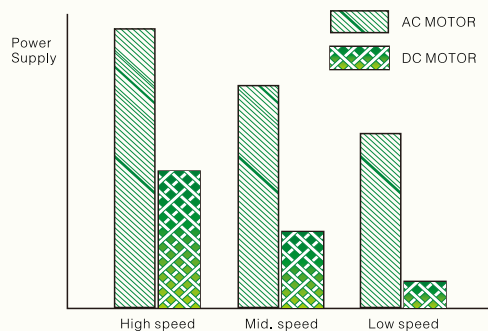

Remarkable energy conservation

The input power of high speed is about 50% of the constant speed motor.
The input power of medium speed is about 30% of the constant speed motor.
The input power of low speed is about 20% of the constant speed motor.



4-way cassette FCU performance
(2 tube system)

Model (2 -tube system)			MFP-34KM-(Q)MM1	MFP-51KM-(Q)MM1	MFP-68KM-(Q)MM1	MFP-85KM-(Q)MM2	MFP-102KM-(Q)MM2	MFP-136KM-(Q)MM3	MFP-170KM-(Q)MM3	MFP-204KM-(Q)MM3	MFP-238KM-(Q)MM3	MFP-272KM-(Q)MM4	
Model of unit			FP-34KM-(Q)M1	FP-51KM-(Q)M1	FP-68KM-(Q)M1	FP-85KM-(Q)M2	FP-102KM-(Q)M2	FP-136KM-(Q)M3	FP-170KM-(Q)M3	FP-204KM-(Q)M3	FP-238KM-(Q)M3	FP-272KM-(Q)M4	
Panel Type			MB-SD11M1			MB-SD11M2			MB-SD11M3			MB-SD11M4	
Power supply			220V,50Hz,1Ph										
Air volume	H	m³/h	380	550	680	880	1050	1380	1750	2050	2200	2720	
	M		300	440	540	700	840	1100	1400	1640	1760	2040	
	L		230	330	410	530	630	830	1050	1230	1320	1360	
Static pressure		Pa	0	0	0	0	0	0	0	0	0	0	
Cooling capacity	TH	H	W	2000	3000	3800	4900	5800	7500	9800	11000	12000	15000
			BTU/h	6824	10236	12966	16719	19790	25590	33438	37532	40944	51180
		SH	W	1400	2200	2850	3500	4250	5500	7150	8250	9100	11175
			BTU/h	4777	7506	9724	11942	14501	18766	24396	28149	31049	38129
	TH	M	W	1700	2550	3250	4150	4950	6400	8350	9350	10200	12450
			W	1150	1800	2350	2850	3500	4550	5950	6850	7650	9560
		L	W	1400	2050	2600	3400	4000	5200	6750	7600	8300	10300
			W	950	1400	1850	2300	2800	3600	4700	5450	6000	8400
Heating capacity	H	W	3100	4700	5900	7600	9000	11600	15200	17100	18600	2400	
	M	W	2650	4000	5000	6450	7650	9850	12900	14550	15800	19900	
	L	W	2100	3150	3950	5100	6050	7750	10200	11450	12450	15200	
Noise	High speed	dB(A)	38	40	42	42	44	46	47	50	51	53	
Power input		W	40	50	58	70	95	130	160	190	210	230	
Waterflow volume		m³/h	0.34	0.51	0.65	0.83	0.99	1.28	1.67	1.87	2.04	2.55	
Pressure dropping		kPa	11	13	22	18	25	23	28	33	42	45	
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Coil		Type	Hydrophilic aluminum fin to wear copper tube										
Max.working pressure MPa			1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	
Condensing water pipe mm			¢26	¢26	¢26	¢26	¢26	¢26	¢26	¢26	¢26	¢26	
Net dimension	Drained by pump	L×W×H mm	590×590×242			750×750×242		840×840×242		840×840×292			946×946×292
			650×650×40			850×850×40		950×950×40			1050×1050×40		
Net weight	Drained by pump	kg	17	18	18	22	23	29	26	27	27	32	
			2.2			4.2		5		6			

4-way cassette FCU performance
(4 tube system)

Model (4 -tube system)			MFP-34KM4-(Q)MM1	MFP-51KM4-(Q)MM1	MFP-68KM4-(Q)MM1	MFP-85KM4-(Q)MM2	MFP-102KM4-(Q)MM2	MFP-136KM4-(Q)MM3	MFP-170KM4-(Q)MM3	MFP-204KM4-(Q)MM3	MFP-238KM4-(Q)MM3	MFP-272KM4-(Q)MM4	
Model of unit			FP-34KM4-(Q)M1	FP-51KM4-(Q)M1	FP-68KM4-(Q)M1	FP-85KM4-(Q)M2	FP-102KM4-(Q)M2	FP-136KM4-(Q)M3	FP-170KM4-(Q)M3	FP-204KM4-(Q)M3	FP-238KM4-(Q)M3	FP-272KM4-(Q)M4	
Panel Type			MB-SD11M1			MB-SD11M2		MB-SD11M3			MB-SD11M4		
Power supply			220V,50Hz,1Ph										
Air volume	H	m³/h	360	520	650	840	1000	1320	1660	1950	2090	2720	
	M		290	420	510	670	800	1050	1330	1560	1670	2040	
	L		220	310	390	500	600	790	1000	1170	1250	1360	
Static pressure		Pa	0	0	0	0	0	0	0	0	0	0	
Cooling capacity	TH	H	W	1950	2950	3700	4800	5700	7350	9600	10800	11750	13200
			BTU/h	6700	10050	12700	16400	19400	25100	32750	36800	40150	45040
		SH	W	1350	2150	2800	3450	4150	5400	7000	8100	8900	10000
			BTU/h	4700	7350	9550	11700	14200	18400	23900	27600	30450	34120
	TH	M	W	1650	2500	3200	4050	4850	6250	8200	9150	10000	11000
			SH	W	1150	1750	2300	2800	3450	4450	5850	6700	7500
		L	W	1350	2000	2550	3350	3900	5100	6600	7450	8150	9100
			SH	W	950	1350	1800	2250	2750	3550	4600	5350	5900
Heating capacity	H	W	1950	3000	3750	4850	5750	7400	9700	10900	11850	13500	
	M	W	1700	2550	3200	4100	4850	6250	8200	9250	10050	11200	
	L	W	1350	2000	2500	3250	3850	4950	6500	7300	7950	8750	
Noise	High speed	dB(A)	39	41	43	43	45	46	48	51	52	53	
Power input	High speed	W	40	50	58	70	95	130	160	190	210	230	
Waterflow volume	High speed	Cool	m³/h	0.33	0.5	0.64	0.81	0.97	1.25	1.64	1.83	2	2.2
		Heat	m³/h	0.22	0.33	0.42	0.54	0.64	0.82	1.08	1.21	1.32	1.5
Pressure dropping	Cool	kPa	11	13	22	18	25	23	28	33	42	42	
		Heat	7	8	13	11	15	15	19	23	26	30	
Water tube connection(inlet)		Cooling and heating coil	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Coil		Type	Hydrophilic aluminum fin to wear copper tube										
Max.working pressure			MPa	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	
Condensing water pipe			mm	¢ 26	¢ 26	¢ 26	¢ 26	¢ 26	¢ 26	¢ 26	¢ 26	¢ 26	
Net dimension	Drained by pump		L×W×H mm	590×590×242			750×750×242		840×840×242		840×840×292		946×946×292
	Panel			650×650×40			850×850×40		950×950×40		1050×1050×40		
Net weight	Drained by pump		kg	19	20	20	24.5	25.5	27.5	29.5	29.5	30	33
	Panel			2.2			4.2			5			6

'G' style

Surround air flow type fan coil unit
(Drained pump inside)

Characteristic


- 1、Surround Air flowing (8-way), there wind can arrive every where in the room(fit model 600/800/1000/1200/1400cfm)



- 2、Fashion designs, the panel is beautiful and elegant
3、Thin design unit which can be installed in a limit ceiling (the Min. thickness is 240mm)
4、Remote controller is standard and wire controller is optional




- 5、Quiet running
Because adopt bigger diameter fan, we can reduce the running speed of the fan, which will cause to lower noise.
6、High lift water drained pump (750mm), easy to plan the Condensate drained pipe

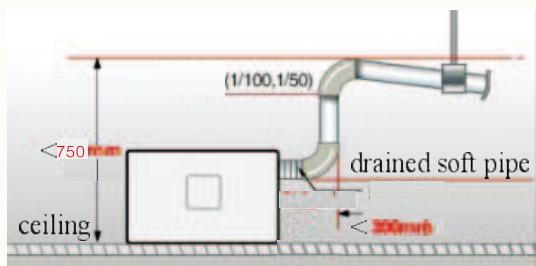



- 7、Auto swing
8、Float switch inside to prevent from leaking

- 9、Fresh air can be inputed from outside



Fresh air can be input
■ The unit offer a connection to input fresh air from outside, will be improve the indoor environment

- 10、Negative ion generator is optional
11、The water remain in the tray is easy to drained by manual.
There are a rubber plug on the water collecting tray, we can drained out the dirty water by manual.
Because the water remained inside the tray will keep for a long time, then there will be very dirty and there might be lots bacterial inside too, draining out the dirty water is benefit to the health and also reduce the possible of pump blocking.
12、Easy to be installed, Low installation cost



- 13、Fan and fan motor is easy to maintain
14、Square panels, which can choose the direction of inlet/outlet water connection freely
15、Corner cover design makes installation and maintain conveniently.
16、Easily interfaced with most widely used BMS and proprietary supervisory system based on mod Bus protocol.



- 17、Water valve can be installed inside the unit(optional).
18、Stainless steel hose can be installed to the unit and act as the inlet/outlet water connection of the unit(optional)
19、4-tube system is optional

Dc motor is optional

Excellent performance——

Optional brushless DC motor, high efficiency and energy saving


Wolong/Panasonic brushless plastic package DC motor is optional.

High working efficiency, but energy efficiency is over 50% lower than the average motor.

Long working life:

With plastic package, the humidity and dust will not easily access to the inner motor.

High electrical efficiency, low temperature rise and slow aging of internal components.

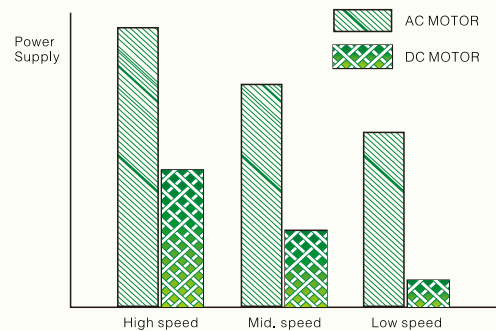




Remarkable energy conservation

The input power of high speed is about 50% of the constant speed motor.

The input power of medium speed is about 30% of the constant speed motor.

The input power of low speed is about 20% of the constant speed motor.

Installing dimension

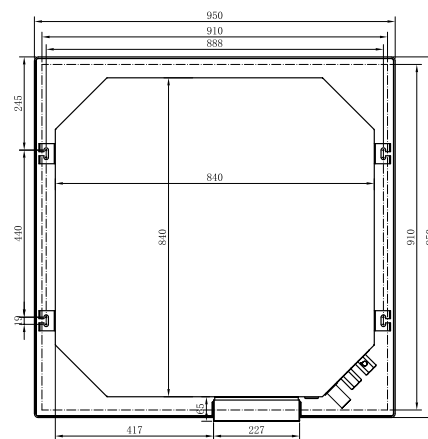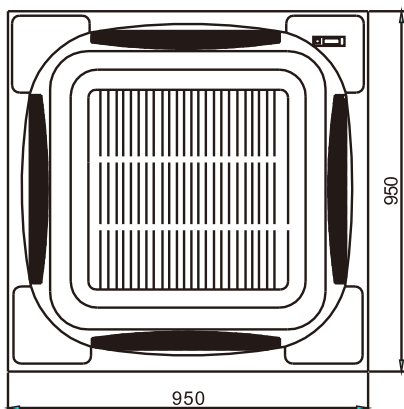

thick- ness	FP-85KM-QGG3	FP-170KM-QGG3
	FP-102KM-QGG3	FP-204KM-QGG3
	FP-136KM-QGG3	FP-238KM-QGG3
H	242	292

unit: mm


Surround air flow FCU performance (2 tube system)

Model (2 -tube system)			MFP-85KM-(Q)GG3	MFP-102KM-(Q)GG3	MFP-136KM-(Q)GG3	MFP-170KM-(Q)GG3	MFP-204KM-(Q)GG3	MFP-238KM-(Q)GG3	
Model of unit			FP-85KM-(Q)G3	FP-102KM-(Q)G3	FP-136KM-(Q)G3	FP-170KM-(Q)G3	FP-204KM-(Q)G3	FP-238KM-(Q)G3	
Panel Type			MB-SA01G3						
Power supply			220V,50Hz,1Ph						
Air volume	H	m³/h	880	1050	1380	1750	2050	2200	
	M		700	840	1100	1400	1640	1760	
	L		530	630	830	1050	1230	1320	
		Pa	0	0	0	0	0	0	
Cooling capacity	TH	H	W	4900	5800	7500	9800	11000	12000
			BTU/h	16719	19790	25590	33438	37532	40944
		SH	H	W	3500	4250	5500	7150	8250
	BTU/h			11942	14501	18766	24396	28149	31049
	TH	M	W	4150	4950	6400	8350	9350	10200
			W	2850	3500	4550	5950	6850	7650
		SH	L	W	3400	4000	5200	6750	7600
	W			2300	2800	3600	4700	5450	6000
	Heating capacity	H	W	7600	9000	11600	15200	17100	18600
M		W	6450	7650	9850	12900	14550	15800	
L		W	5100	6050	7750	10200	11450	12450	
Noise	High speed	dB(A)	42	45	46	48	50	52	
Power input		W	70	85	125	150	190	210	
Waterflow volume		m³/h	0.83	0.99	1.28	1.67	1.87	2.04	
Pressure dropping	kPa	21	24	26	35	36	42		
Water tube connection(inlet)		ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Water tube connection(outlet)		ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Coil		Type	Hydrophilic aluminum fin to wear copper tube						
Max.working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	
Condensing water pipe		mm	¢ 26	¢ 26	¢ 26	¢ 26	¢ 26	¢ 26	
Net dimension	unit	L×W×H mm	840×840×242			840×840×292			
	Panel		950×950×45						
Net weight	unit	kg	24.3	24.6	25	28	28	30	
	Panel		6						

Surround air flow FCU performance (4 tube system)

Model (4 -tube system)			MFP-85KM4-(Q)GG3	MFP-102KM4-(Q)GG2	MFP-136KM4-(Q)GG3	MFP-170KM4-(Q)GG3	MFP-204KM4-(Q)GG3	MFP-238KM4-(Q)GG3		
Model of unit			FP-85KM4-(Q)G3	FP-102KM4-(Q)G2	FP-136KM4-(Q)G3	FP-170KM4-(Q)G3	FP-204KM4-(Q)G3	FP-238KM4-(Q)G3		
Panel Type			MB-SA01G3							
Power supply			220V,50Hz,1Ph							
Air volume	H	m³/h	840	1000	1320	1660	1950	2090		
	M		670	800	1050	1330	1560	1670		
	L		500	600	790	1000	1170	1250		
Static pressure		Pa	0	0	0	0	0	0		
Cooling capacity	TH	H	W	4800	5700	7350	9600	10800	11750	
			BTU/h	16400	19400	25100	32750	36800	40150	
			W	3450	4150	5400	7000	8100	8900	
	SH	H	BTU/h	11700	14200	18400	23900	27600	30450	
			W	4050	4850	6250	8200	9150	10000	
			M	W	2800	3450	4450	5850	6700	7500
	TH	L		W	3350	3900	5100	6600	7450	8150
				W	2250	2750	3550	4600	5350	5900
	Heating capacity	H	W	4850	5750	7400	9700	10900	11850	
M		W	4100	4850	6250	8200	9250	10050		
L		W	3250	3850	4950	6500	7300	7950		
Noise	High speed	dB(A)	42	45	46	48	50	52		
Power input		W	70	85	125	150	190	210		
Waterflow volume	High speed	Cool Heat	m³/h	0.84	0.97	1.25	1.64	1.83	2	
				0.51	0.64	0.82	1.08	1.21	1.32	
Pressure dropping	Cool Heat	kPa	21	24	26	35	36	42		
			10	13	15	19	23	26		
Water tube connection(inlet)		Cooling and heating coil	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Coil		Type	Hydrophilic aluminum fin to wear copper tube							
Max.working pressure			MPa	1.6	1.6	1.6	1.6	1.6		
Condensing water pipe			mm	ø 26	ø 26	ø 26	ø 26	ø 26		
Net dimension	unit	L×W×H mm	840×840×242			840×840×292				
	Panel		950×950×40							
Net weight	unit	kg	27	27.3	27.6	30.6	31.7	31.7		
	Panel		6							

Decorative 4-side air flowing type fan coil unit

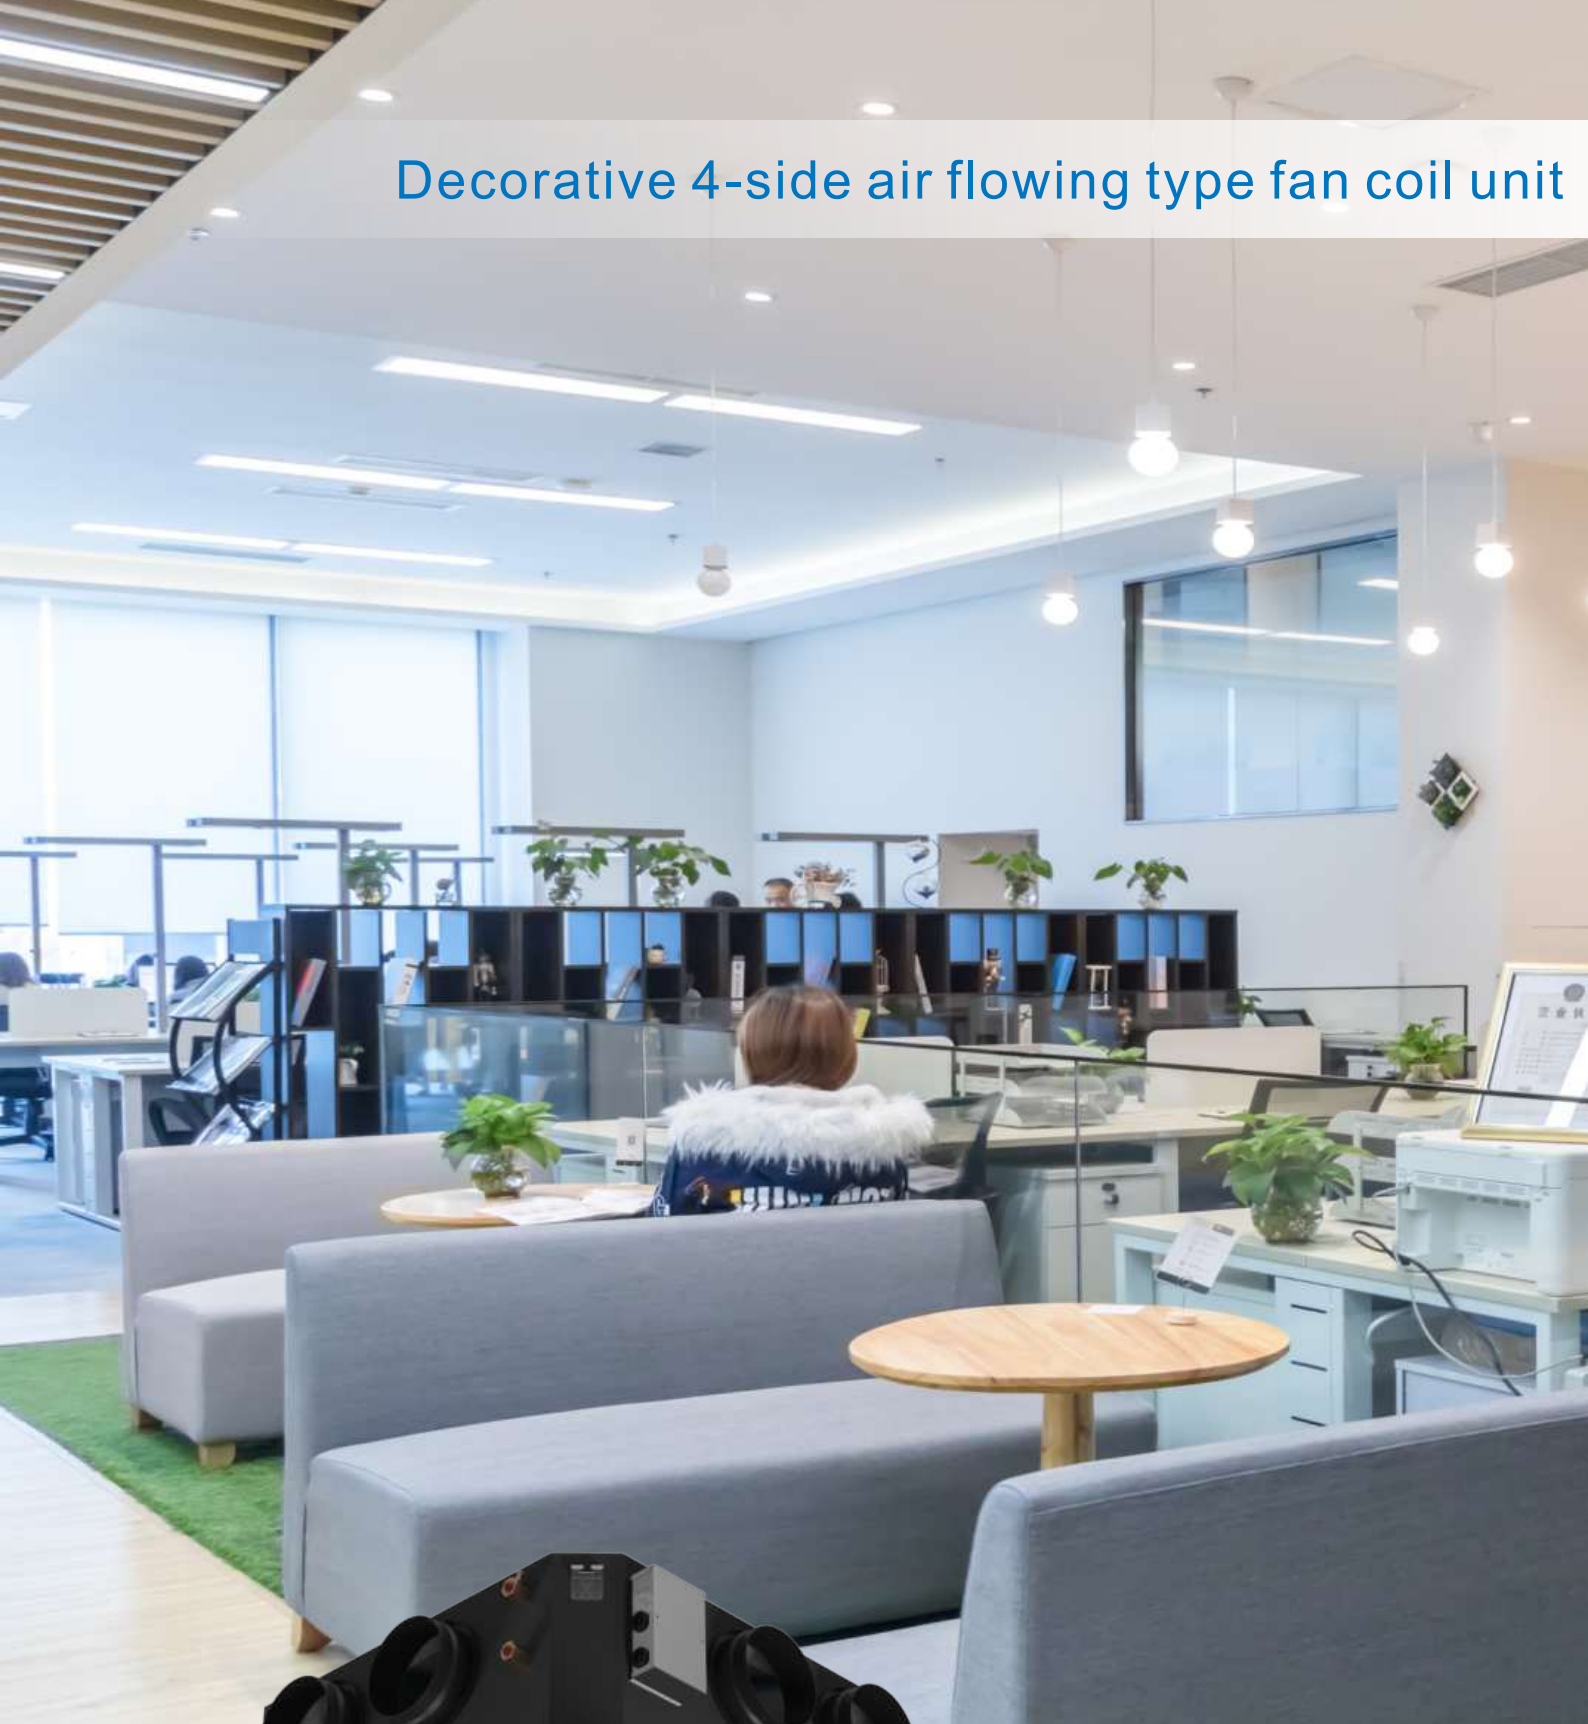


Decorative 4-side air flowing fan coil unit characteristic

1、 Customizable metal grille air inlet design, easy to fit with the decoration


8、 Can connect to duct and link with diffuser

2、 4-side air flowing ,which can uniform temperature distribution in the room

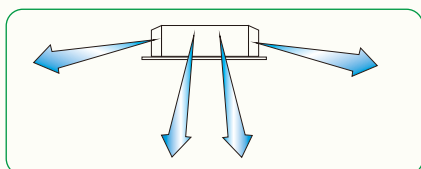

3、 Condensate water drain pump is optional

High lift water drained pump (750/1200mm), easy to plan the

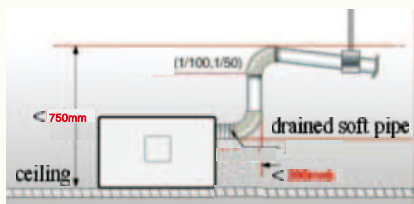

4、 All the key parts are easy to maintain from the air inlet grille;


5、 Quiet running

Using advanced 3D software to design the centrifugal fan with streamline and big diameter turbine.

The efficiency of airflow rate, heavy wind volume and low noise is excellent. Because the ventilator wheel is processed to sine strip seam, which enhances its flexibility, and drops the vibration of ventilator during revolving in large scale, simultaneously reduced the motor noise caused by ventilator swinging.




6、 Fresh air can be input from outside



■ The unit offer a connection to input fresh air from outside , will be improve the indoor environment

7、 Electrostatic dust sanitiser is optional
(Drained by nature style)

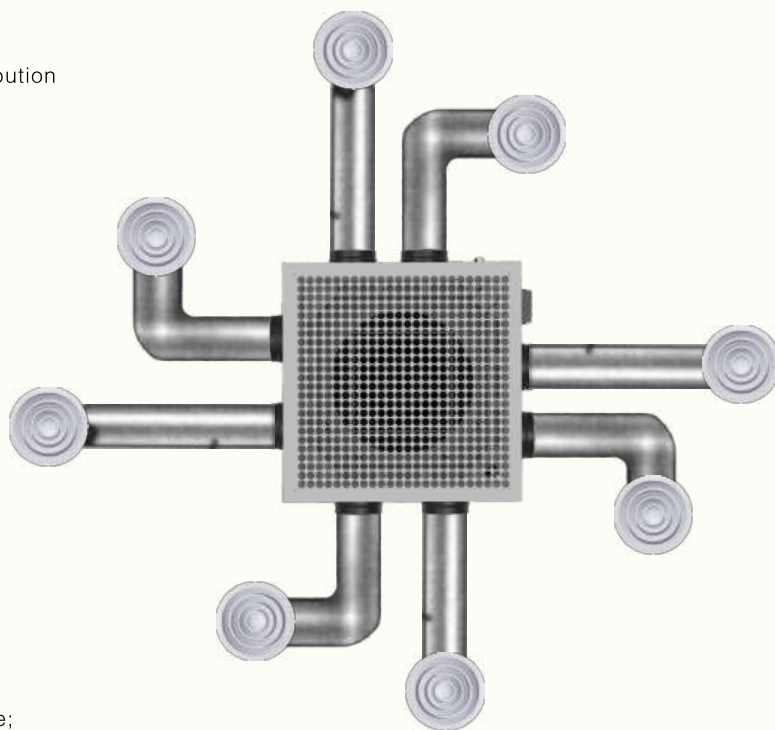

9、 The models(272/300) with big air volume is fitable for the projects which have big space


Low installation cost ;








▶ Installing dimension

Drained by nature style


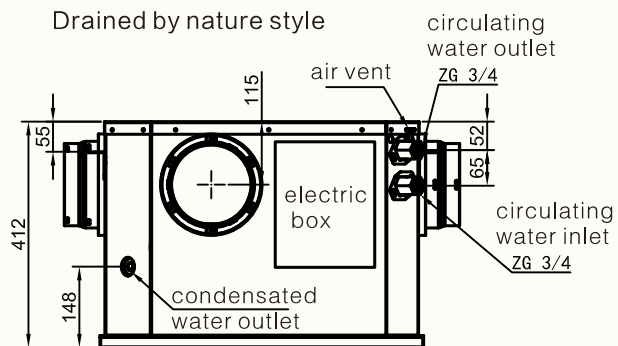


Drained by nature style

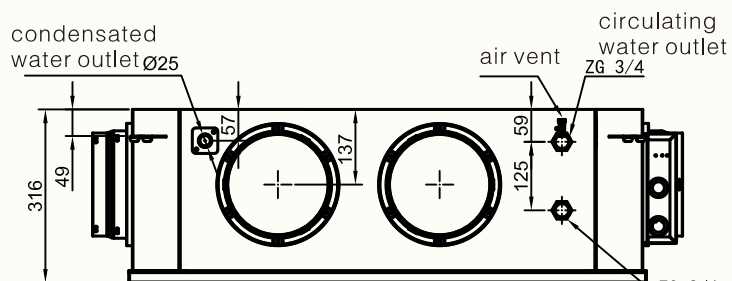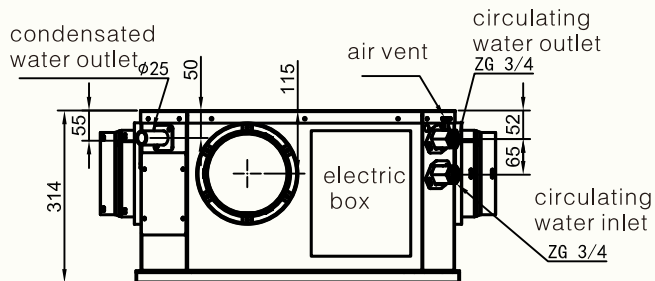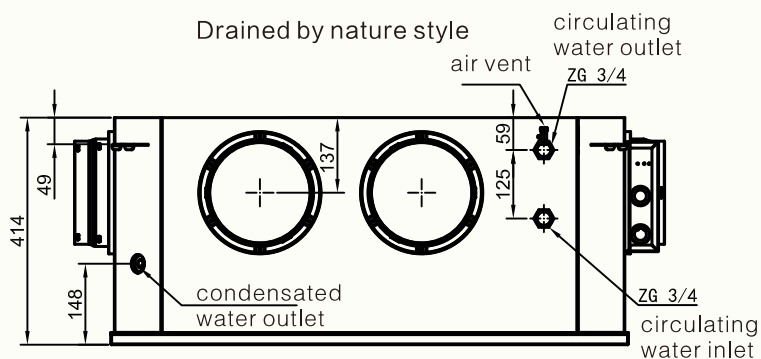

Drained by pump style

Drained by pump style

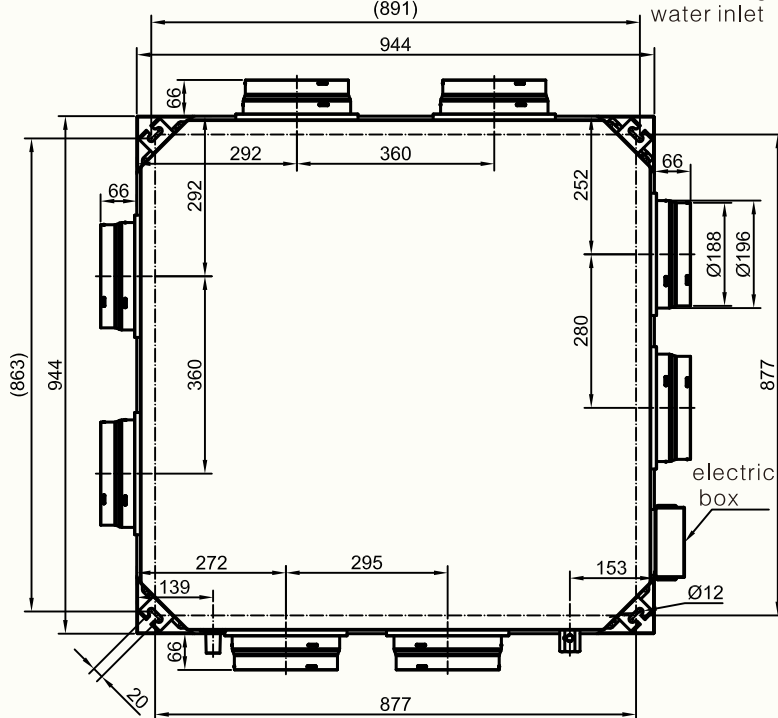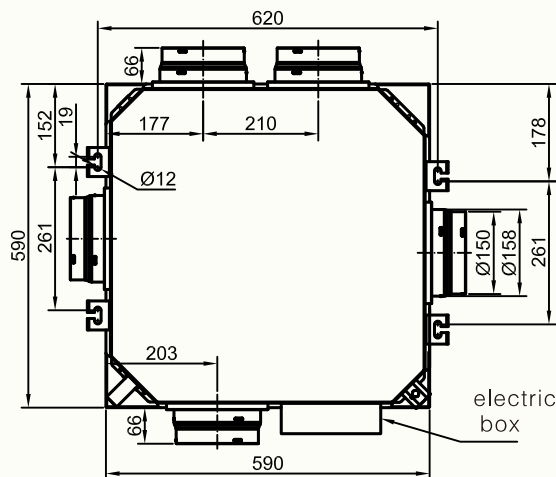

model	MFP-68FM-(Q)
	MFP-85FM-(Q)

model	MFP-272FM-(Q)
	MFP-300FM-(Q)

4-side air flowing fan performance (2 tube system)

Model (2 -tube system)			MFP-68FM-(Q)	MFP-85FM-(Q)	MFP-272FM-(Q)	MFP-300FM-(Q)			
Power supply			220V,50Hz,1Ph						
Air volume	H	m³/h	680	850	2720	3000			
	M		520	660	2040	2300			
	L		370	430	1360	1600			
		Pa	0	0	0	0			
Cooling capacity	TH	H	W	3800	4700	15000	17000		
			BTU/h	11940	14767	47130	53414		
			W	2830	3500	11175	12665		
	SH	H	BTU/h	9660	11950	38129	43212		
			W	3080	3800	12150	13770		
			TH	M	W	2430	3000	9600	10878
	SH	L			W	2400	2960	9450	10710
					W	1950	2430	7749	8782
			Heating capacity	H	W	5700	7050	22500	25500
M	W	4400		5430	17300	19600			
L	W	3450		4260	13600	15400			
Noise	High speed	dB(A)	41	43	53	54			
Power input		W	58	65	180	193			
Waterflow volume		m³/h	0.65	0.81	2.58	2.92			
Pressure dropping	kPa		22	28	51	58			
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"			
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"			
Coil		Type	Hydrophilic aluminum fin to wear copper tube						
Max.working pressure			MPa	1.6	1.6	1.6	1.6		
Condensing water pipe		mm	ø 26						
Net dimension	Drained by pump	L x W x H mm	590*590*314			944*944*316			
	Drained by nature		590*590*412			944*944*414			
Net weight	Drained by pump	kg	20			41			
	Drained by nature		21.5			43			

4-side air flowing fan performance (4 tube system)

Model (4 -tube system)			MFP-68FM4-(Q)	MFP-85FM4-(Q)	MFP-272FM4-(Q)	MFP-300FM4-(Q)		
Power supply			220V,50Hz,1Ph					
Air volume	H	m³/h	680	850	2720	3000		
	M		520	660	2040	2300		
	L		370	430	1360	1600		
Static pressure		Pa	0	0	0	0		
Cooling capacity	TH	H	W	3800	4700	15000	17000	
			BTU/h	11940	14767	47130	53414	
		SH	H	W	2830	3500	11175	12665
				BTU/h	9660	11950	38129	43212
	TH	M	W	3080	3800	12150	13770	
			SH	W	2430	3000	9600	10878
		TH	L	W	2400	2960	9450	10710
				SH	W	1950	2430	7749
Heating capacity	H	W	3700	4580	14630	16580		
	M	W	3010	3720	11900	13480		
	L	W	2300	2840	9060	10300		
Noise	High speed	dB(A)	41	43	53	54		
Power input	High speed	W	58	65	180	193		
Waterflow volume	High speed	Cool	m³/h	0.65	0.81	2.58	2.92	
		Heat	m³/h	0.32	0.4	1.26	1.47	
Pressure dropping	Cool	kPa	22	28	51	58		
			Heat	16	21	32	35	
Water tube connection(inlet)		Coil and heating coil	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Coil		Type	Hydrophilic aluminum fin to wear copper tube					
Max.working pressure			MPa	1.6	1.6	1.6	1.6	
Condensing water pipe			mm	ø 26				
Net dimension	Drained by pump	L x W x H mm	590*590*314		944*944*316			
	Drained by nature		590*590*412		944*944*414			
Net weight	Drained by pump	kg	21.5		43			
	Drained by nature		23		45			



HIGH WALL MOUNTED TYPE FAN COIL UNIT

- 1: Digital display panel
- 2: Remote controller
- 3: Stainless steel hose, let the water connection easily (optional)
- 4: Power down memory function



▶ Performance

High wall mounted FCU standard type


Model (2 -tube system)			MFP-34BM-C	MFP-51BM-C	MFP-68BM-C	MFP-85BM-C	MFP-102BM-C	MFP-136BM-C		
Power supply			220V,50Hz,1Ph							
Air volume	H	m³/h	340	510	680	850	1020	1360		
	M		260	380	515	650	765	1010		
	L		180	260	340	43	520	700		
Static pressure		Pa	0	0	0	0	0	0		
Cooling capacity	TH	H	W	1800	2700	3600	4500	5400	7200	
			BTU/h	6142	9212	12283	15354	18425	24566	
	SH		M	W	1350	2025	2700	3375	4050	5400
				BTU/h	4606	6909	9212	11516	13819	18424
	TH	L		W	1476	2214	2952	3690	4428	5904
	SH			W	978	1399	1963	2409	3044	3926
	TH		W	1098	1647	2196	2745	3294	4392	
	SH		W	649	960	1355	1715	2060	2710	
Heating capacity	H		W	2700	4050	5400	6750	8100	10800	
	M		W	2146	3219	4293	5366	6439	8586	
	L		W	1512	2268	3024	3780	4536	6048	
Noise	High speed		dB(A)	0.31	0.46	0.62	0.77	0.93	1.24	
Power input		High speed	W	12	14	17	18	22.5	23.5	
Waterflow volume		High speed	m³/h	57	67	74	82	55	65	
Pressure dropping			kPa	86	100	110	122	83	97	
Water tube connection(inlet)			ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"		
Water tube connection(outlet)			ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"		
Coil		Type	Hydrophilic aluminum fin to wear copper tube							
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6		
Condensing water pipe			mm	ø 16	ø 16	ø 16	ø 16	ø 16		
Net dimension	L × W × H		mm	850X300X198	850X300X198	970X315X235	970X315X235	1100X330X235	1100X330X235	
Net weight			kg	11	11	15	15	20	20	

Ceiling floor type fan coil unit



Characteristic


- 1、Classical elegant design
- 2、Can be installed by ceiling mounted, floor standing or wall mounted

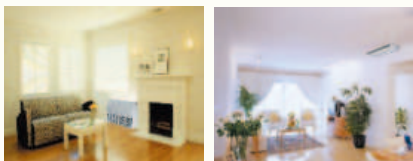


- 3、Remote controller is standard and wire controller is optional



- 4、Wide air flowing range

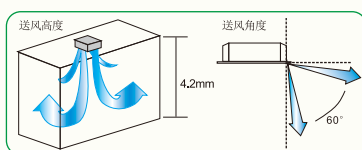

- 5、Auto swing
- 6、Quiet running

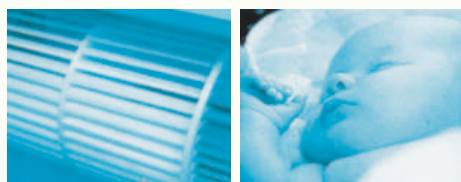

- 7、Stainless steel hose can be installed as inlet/outlet water connection(optional)



- 8、Easily interfaced with most widely used BMS and proprietary supervisory system based on mod Bus protocol.




- 9、Water valve can be installed inside the unit(optional).

Water valve is used to control the on/off water flowing to the unit, we installed the valve into the unit, so the user do not need to installed it by themself.




- 10、4-tube system is optional

Installing dimension

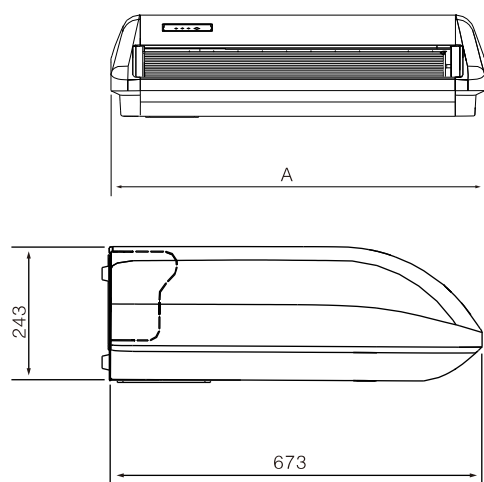

Connect
pipe site

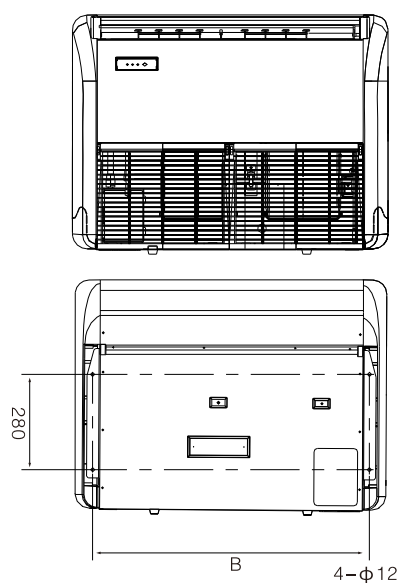

Unit: mm


Model	FP-51 / 68 / 85/ZDM	FP-102 / 136/ZDM	FP-170 / 204 / 238/ZDM
A	905	1288	1672
B	801	1184	1568

Performance

Ceiling&floor type FCU(2-tube system)

Model(2-tube system)			MFP-51ZDM	MFP-68ZDM	MFP-85ZDM	MFP-102ZDM	MFP-136ZDM	MFP-170ZDM	MFP-204ZDM	MFP-238ZDM
Power supply			220V,50Hz,1Ph							
Air volume	H	m ³ /h	510	680	850	1020	1360	1700	2040	2380
	M		380	515	660	765	1040	1280	1550	1800
	L		260	340	430	530	710	860	1050	1280
Static pressure		Pa	0	0	0	0	0	0	0	0
Cooling capacity	TH	H	W	2700	3600	4500	5400	7200	9000	12600
			BTU/h	9212	12283	15354	18425	24566	30708	42991
			W	1990	2730	3174	4261	5385	6746	9062
	SH	H	BTU/h	6790	9315	10830	14539	18374	23017	30920
			W	2485	3030	3752	4467	6499	7926	9389
			W	1571	2015	2450	3071	4278	5447	6669
	TH	M	W	2078	2504	2950	3831	5660	7295	8619
			W	1212	1545	1844	2397	3317	4460	5555
			W	4050	5400	6750	8100	10800	13500	16200
Heating capacity	H	W	2792	3970	4941	5740	7987	10557	13101	14011
	M		1788	2801	3533	3907	5464	7048	8714	9778
	L									
Noise	High speed	dB(A)	39	41	43	45	46	48	50	51
Power input	High speed	W	52	62	76	96	134	152	189	228
Waterflow volume	High speed	m ³ /h	0.46	0.62	0.77	0.93	1.23	1.54	1.85	2.16
Pressure dropping		kPa	11.8	13.6	21	23	25	32	33	38
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"
Coil		Type	Hydrophilic aluminum fin to wear copper tube							
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
Condensation pipe size (diameter)		mm	ø 26	ø 26	ø 26	ø 26	ø 26	ø 26	ø 26	ø 26
Net dimension		LxWxH	905×673×243			1288×673×243			1672×673×243	
Net weight		kg	26	28	30	38	40	42	45	45

Ceiling conceal ducted type fan coil unit(B series)

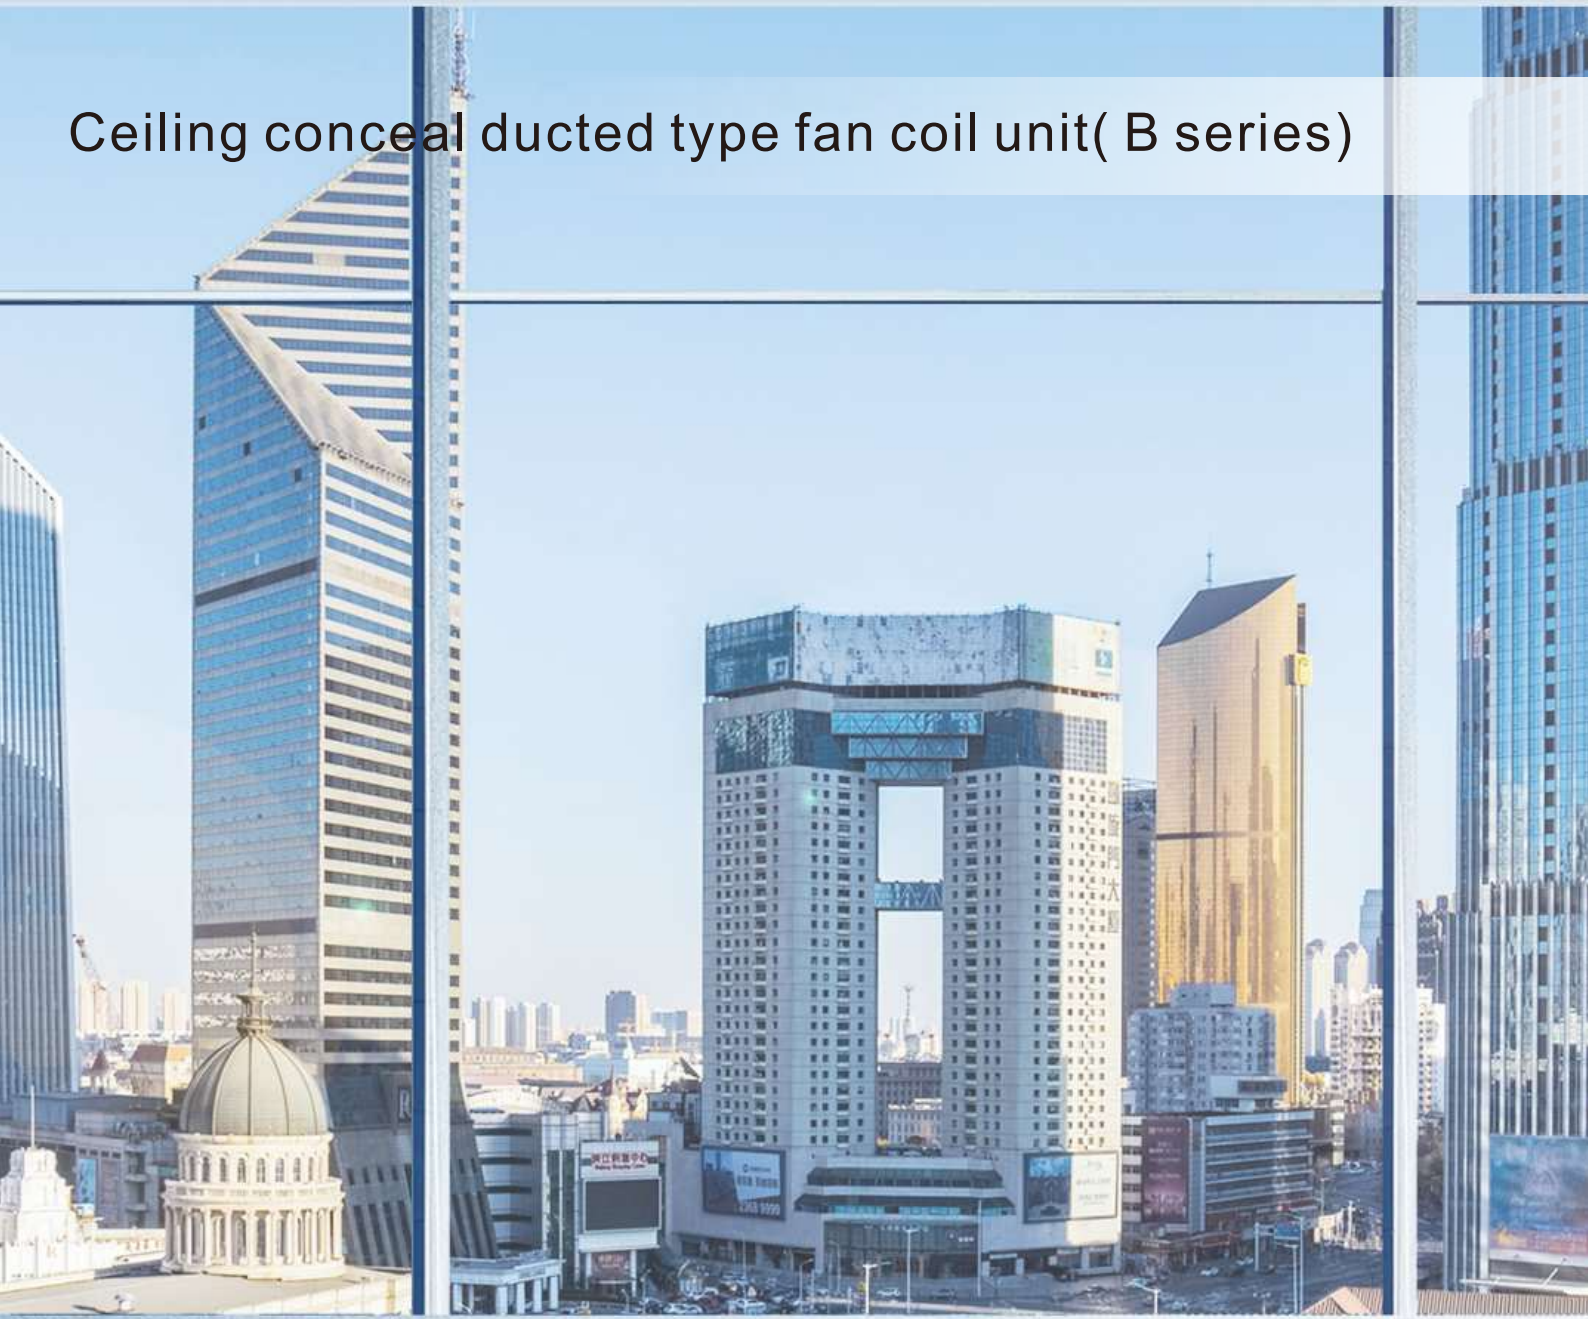

Characteristic

1、Fan

Our fans are made by international professional fan manufacture with stable quality and reliable character with routine dynamic balance precise debug.
Fan runs stably and quietly.

2、Water collection tray

Tensile plate with high-grade, smooth surface spray, corrosion resistance, anti-rust;
One-time stamping molding process, without weld or solder joint;
Adopt the overall thermal insulation, in order to avoid secondary condensate drip tray;
Two-way diversion mouth slope shape design, condensate water speed, reduce the water remain inside the tray, effectively reduce the rate of bacterial growth; large condensate tray designed to eliminate surface cooler and access to water dripping outside the interface of the phenomenon of condensation

3、Heat exchanger

Hydrophilic aluminum fin to wear high quality copper tube, high heat exchanging efficiency, large heat exchanging area, low pressure dropping, large cooling and heating capacity.
High quality material copper can support big water pressure.

4、Air return box is optional, which can ease installation, reducing construction cost

5、Integrated models

Air volume from 340 to 2380m³/h, include 9 models and also different static pressure type;





6、High efficiency

Adopt good quality heat exchanger and fan, which is benefit to the heat exchanging capacity and efficiency

7、Symmetrical design, easy installation

Symmetrical design, it is easy to change the unit from left(right) water tube connection to right(left) connection

Installing dimension(without air plenum)

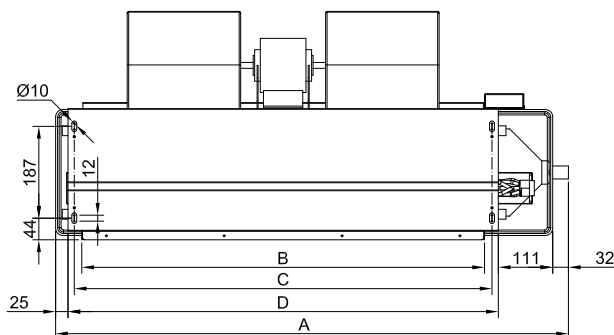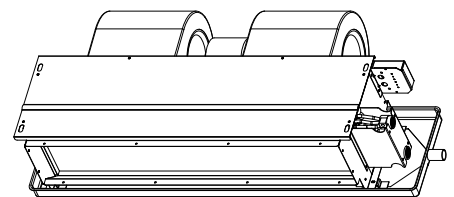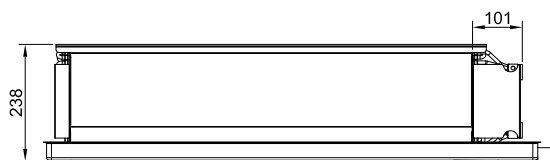

MODEL	MFP-34WA-B	MFP-51WA-B	MFP-68WA-B
A	624	814	864
B	400	590	640
C	430	620	670
D	456	646	696
MODEL	MFP-85WA-B	MFP-102WA-B	MFP-136WA-B
A	944	1044	1424
B	720	820	1200
C	750	850	1230
D	776	876	1256
MODEL	MFP-170WA-B	MFP-204WA-B	MFP-238WA-B
A	1474	1674	1824
B	1250	1450	1600
C	1280	1480	1630
D	1306	1506	1656

Ceiling conceal ducted type fan coil unit (2-tube system)

Model(2-tube system)			MFP-34WA-B	MFP-51WA-B	MFP-68WA-B	MFP-85WA-B	MFP-102WA-B	MFP-136WA-B	MFP-170WA-B	MFP-204WA-B	MFP-238WA-B	
Power supply			220V,50HZ,1PH									
Air volume	H	m³/h	340	510	680	850	1020	1360	1700	2040	2380	
	M		270	380	515	660	765	1040	1280	1550	1800	
	L		190	260	340	430	530	710	860	1050	1280	
Static pressure		Pa	12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	
Cooling capacity	TH	H	W	2150	3200	4000	5000	5800	8000	9500	11300	12800
			BTU/h	7335	10918	13648	17060	19789	27296	32414	38555	43673
			W	1530	2230	2850	3530	4230	5790	6850	8110	9140
	SH	M	BTU/h	5220	7608	9724	12044	14432	19755	23372	27671	31185
			W	1710	2510	3305	4090	4790	6660	7695	9153	10000
			W	1210	1715	2320	2890	3345	4715	5470	6340	7165
	TH	L	W	1355	2000	2470	3000	3520	5150	5870	6820	7850
			W	980	1420	1735	2020	2500	3530	4075	4950	5580
Heating capacity	H	W	3350	5050	6250	7900	9150	12500	15100	17800	20100	
	M		2650	3900	5100	6350	7400	10300	11950	14200	15500	
	L		2100	3100	3850	4650	5450	8000	9100	10550	12150	
Noise	High speed	12Pa	dB(A)	37	39	41	43	45	47	48	50	52
		30/50		39/42	41/44	43/46	45/47	48/49	49/50	50/52	52/54	54/56
Power input	High speed	12Pa	W	37	52	62	76	96	134	152	189	228
		30/50		44/49	59/66	72/84	87/100	108/118	156/174	174/210	212/250	253/300
Waterflow volume	High speed	m³/h	0.37	0.55	0.69	0.86	0.99	1.37	1.63	1.94	2.19	
Pressure dropping		kPa	16	22	18	29	22	27	35	37	38	
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Coil		Type	Hydrophilic aluminum fin to wear copper tube									
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	
Condensation pipe size (diameter)			mm									
Net dimension			DN20(External thread)									
Net dimension		L×W×H	mm	624×465×235	814×465×235	864×465×235	944×465×235	1044×465×235	1424×465×235	1474×465×235	1824×465×235	
Net weight		kg	11	13	14	16	17	26	29	32	34	

Ceiling conceal ducted type fan coil unit (4-tube system)

Model (4-tube system)				MFP-34WA4-B	MFP-51WA4-B	MFP-68WA4-B	MFP-85WA4-B	MFP-102WA4-B	MFP-136WA4-B	MFP-170WA4-B	MFP-204WA4-B	MFP-238WA4-B	
Power supply				220V,50HZ,1PH									
Air volume	H	m³/h		340	510	680	850	1020	1360	1700	2040	2380	
	M		270	380	515	660	765	1040	1280	1550	1800		
	L		190	260	340	430	530	710	860	1050	1280		
Static pressure		Pa		12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	12(30,50)	
Cooling capacity	TH	H	W	2150	3200	4000	5000	5800	8000	9500	11300	12800	
			BTU/h	7335	10918	13648	17060	19789	27296	32414	38555	43673	
		SH	W	1530	2230	2850	3530	4230	5790	6850	8110	9140	
			BTU/h	5220	7608	9724	12044	14432	19755	23372	27671	31185	
	TH	M	W	1710	2510	3305	4090	4790	6660	7695	9153	10000	
			SH	W	1210	1715	2320	2890	3345	4715	5470	6340	7165
		TH	L	W	1355	2000	2470	3000	3520	5150	5870	6820	7850
				SH	W	980	1420	1735	2020	2500	3530	4075	4950
Heating capacity	H	W		1350	2000	2500	3150	3650	5000	6000	7100	8000	
	M			1050	1550	2050	2550	2950	4100	4750	5650	6150	
	L			850	1250	1550	1850	2150	3200	3600	4200	4850	
Noise	High speed	12Pa	dB(A)	37	39	41	43	45	47	48	50	52	
		30Pa		39/42	41/44	43/46	45/47	48/49	49/50	50/52	52/54	54/56	
Power input	High speed	12Pa	W	37	52	62	76	96	134	152	189	228	
		30Pa		44/49	59/66	72/84	87/100	108/118	156/174	174/210	212/250	253/300	
Waterflow volume	High speed	Cooling tube	m³/h	0.37	0.55	0.69	0.86	0.99	1.37	1.63	1.94	2.19	
		Heating tube		0.12	0.17	0.21	0.27	0.31	0.43	0.51	0.61	0.69	
Pressure dropping		Cooling tube	kPa	16	22	18	29	22	27	35	37	38	
		Heating tube		5	8	8	10	10	12	15	16	18	
Water tube connection(inlet)	Cooling/heating tube		ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Coil		Type	Hydrophilic aluminum fin to wear copper tube										
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	
Condensation pipe size (diameter)		mm	DN20(External thread)										
Net dimension		L×W×H	mm	624×465×235	814×465×235	864×465×235	944×465×235	1044×465×235	1424×465×235	1474×465×235	1674×465×235	1824×465×235	
Net weight		kg	12	14	15	18	19	28	32	35	37		

K STYLE SLIM CEILING CONCEAL DUCT TYPE FAN COIL UNIT

Characteristic

1、Thin thickness design

The thickness of the unit is 200 mm, and the inclined coil design is adopted to save the ceiling space.

2、Low noise fan

Innovative plastic fan is adopted. The volute is designed to remove eddy current. The quality is stable and reliable. The operation is stable and the noise is low. The fan runs smoothly and quietly;

3、DC motor is standard

The brushless DC 3-speed (5-speed) motor has long operation life and low noise.

4、Water collection tray

Using high-grade drawing plate, surface spray treatment, smooth, corrosion resistance, rust resistance; one-time stamping process, no weld, solder joint. Overall thermal insulation treatment, thermal insulation layer does not rise and fall off. The two-way diversion port slope design can make the condensate water flow faster without water storage and effectively reduce the bacteria breeding rate; the larger condensate plate design can eliminate the surface cooler and the air conditioner. The condensation water is not easy to drops out at the interface of inlet and outlet pipes;

5、Heat exchanger

High quality copper tube, with high heat transfer efficiency, high toughness, high hardness and other characteristics, can withstand high water pressure, especially suitable for the use of high-rise buildings; fin spacing by computer simulation optimization design. The experimental feedback is improved, the heat exchange area is sufficient, the air outlet is smooth, and the heat exchange efficiency is high;

6、Air return box is standard

Air return box is standard, which can ease installation, reducing construction cost



7、High efficiency

The high efficiency counter current heat exchanger and large diameter centrifugal fan are used to optimize the design of air duct and improve the heat transfer effect of the unit;

8、Left/right pipe connection is customized



Installing dimension

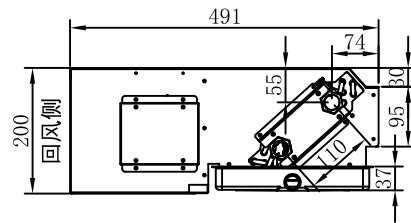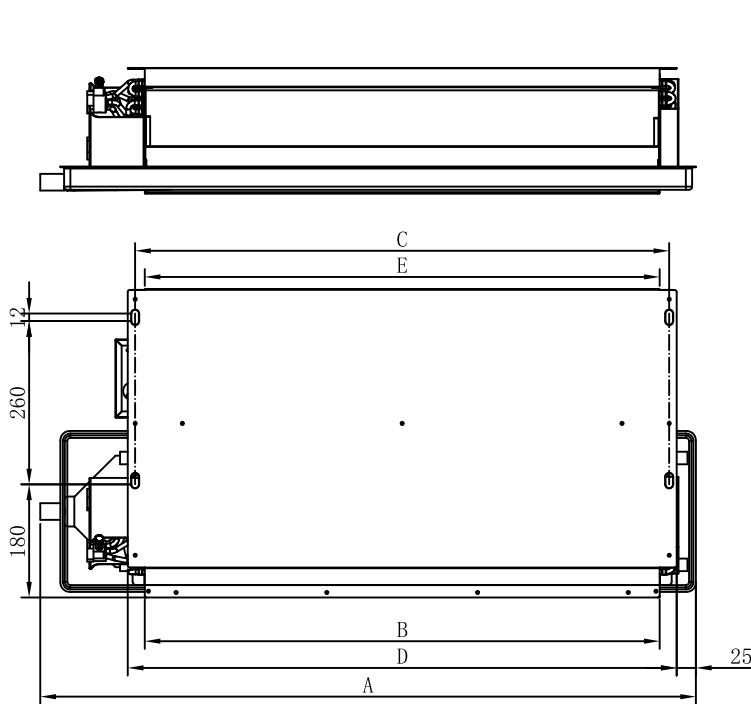

air volume ^{m³} /h	340	510	680
A	674	864	914
B	400	590	640
C	430	620	670
D	454	644	694
E	400	590	640

air volume ^{m³} /h	850	1020	1360
A	994	1094	1474
B	720	820	1200
C	750	850	1230
D	774	874	1254
E	720	820	1200

air volume ^{m³} /h	1700
A	1524
B	1250
C	1280
D	1304
E	1250

unit : mm

Ceiling conceal ducted type fan coil unit (2-tube system)

Model(2-tube system)				DC3-MFP-51WA-K	DC3-MFP-68WA-K	DC3-MFP-85WA-K	DC3-MFP-102WA-K	DC3-MFP-136WA-K	DC3-MFP-170WA-K
Power supply									
Air volume	H	m³/h		510	680	850	1020	1360	1700
	M		310	410	510	610	820	1020	
	L		150	200	260	310	410	510	
Static pressure		Pa	12(30)	12(30)	12(30)	12(30)	12(30)	12(30)	
Cooling capacity	TH	H	W	2950	3700	4600	5350	7350	8750
			BTU/h	10070	12620	15700	18250	25080	29860
		SH	W	2160	2710	3370	3920	5350	6410
			BTU/h	7370	9250	11500	13380	18360	21870
	TH	M	W	2300	2890	3590	4170	5730	6830
			W	1560	1960	2440	2840	3900	4640
		L	W	1330	1670	2070	2410	3310	3940
			W	840	1040	1300	1500	2060	2460
Heating capacity	H	W		4650	5750	7250	8400	11500	13900
	M		3560	4480	5560	6460	8880	10580	
	L		2060	2580	3200	3740	5140	6100	
Noise	High speed	12Pa	dB(A)	39	41	43	45	46	48
		30/50		41	43	45	47	48	50
Power input	High speed	12Pa	W	30	36	44	56	78	89
		30/50		33	42	50	66	90	100
Waterflow volume	High speed	m³/h		0.51	0.64	0.79	0.92	1.26	1.51
Pressure dropping		kPa		19	16	25	19	23	30
Water tube connection(inlet)				ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"
Water tube connection(outlet)				ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"
Coil		Type	Hydrophilic aluminum fin to wear copper tube						
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	
Condensation pipe size (diameter)		mm	external screw DN20						
Net dimension		L×W×H	mm	864×491×200	914×491×200	994×491×200	1094×491×200	1474×491×200	1524×491×200
Net weight		kg	13	14	16	17	26	29	

Slim style ceiling conceal duct Fan Coil Unit




Characteristic

- 1、200mm Slim design,beautiful looking,save the space of ceiling;
The fan coil is only 200mm thickness, which is suitable to be installed in a height-limited ceiling;
- 2、Left/Right pipe connection direction is optional;
The water pipe connection direction can be customized, it will benefit to shorten the installation cost;
- 3、Air return box is standard, and air direction can be exchanged between side return and bottom return;
No need to add any material, it is easy to change the fan coil air return direction from side to bottom, or from bottom to side,
- 4、Use plastic fan, which can offer softer air flowing and reduce the noise level;
- 5、Air volume range is from 300cfm to 900cfm(510–1530m³/h), which is fully satisfy to the necessary of home using;
- 6、High efficiency
Adopt good quality heat exchanger and fan, which is beneficial to the heat exchanging capacity and efficiency
- 7 ☐ Drain pump is optional
A 700mm lift drain pump is optional to be built-in the fan coil, the controlling of drain pump is also built-in; Water float switch is standard for the FCU which built-in drain pump, to prevent the leaking of draining;
- 8、DC motor is standard
The brushless DC 3-speed (0–10V stepless) motor has long operation life and low noise.




Installing dimension

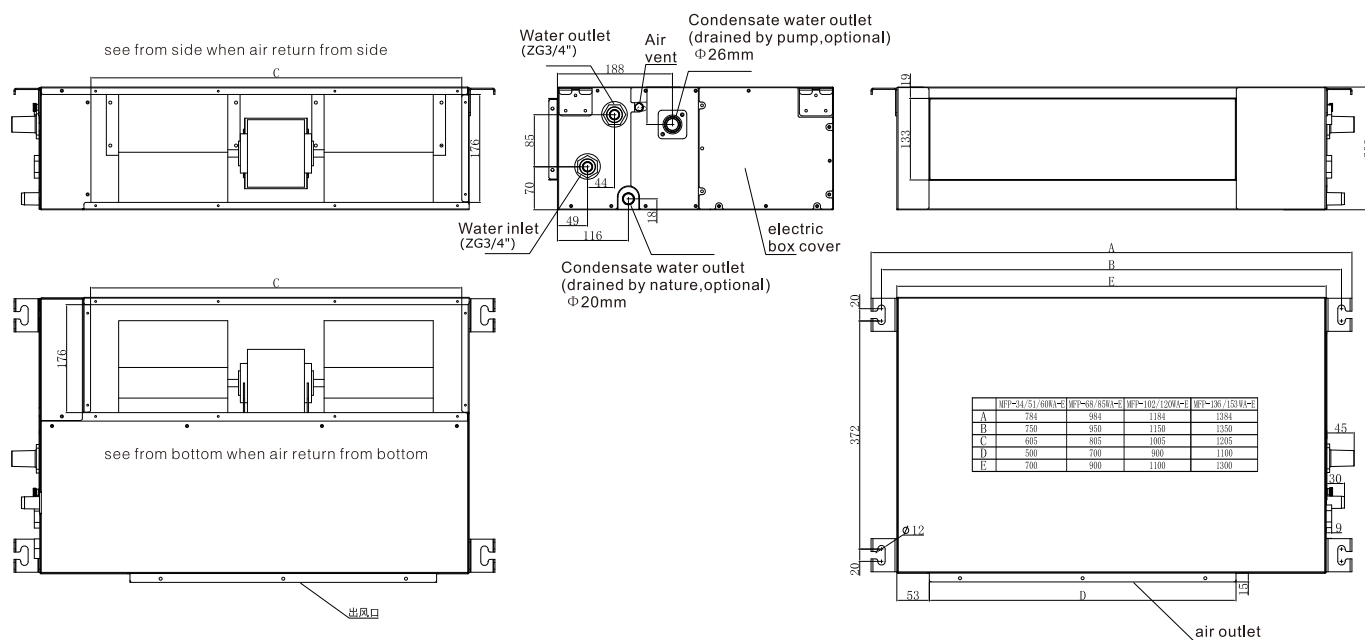

Slim type ceiling conceal fan coil unit (2-tube system)

Model			DC-MFP-34WA-E	DC-MFP-51WA-E	DC-MFP-60WA-E	DC-MFP-68WA-E	DC-MFP-85WA-E	DC-MFP-102WA-E	DC-MFP-120WA-E	DC-MFP-136WA-E	DC-MFP-153WA-E		
Power supply			220V,50Hz,1Ph										
Air volume	H	m³/h	340	510	600	680	850	1020	1200	1360	1500		
	M		200	300	360	400	520	620	720	816	900		
	L		100	150	180	200	260	310	360	408	450		
Static pressure		Pa	12	12	12	12	12	12	12	12	12		
Cooling capacity	TH	H	W	2000	2500	3100	4000	5000	5600	6300	7800	8500	
			BTU/h	6824	8530	10577	13648	17060	19107	21496	26610	29000	
			W	1490	1863	2310	2980	3725	4172	4694	5800	6322	
	SH	H	BTU/h	5084	6357	7882	10168	12710	14235	16016	19800	21570	
			W	1440	1800	32220	2880	3600	4020	4530	5610	6110	
			SH	M	W	1050	1290	1620	2070	2580	2910	3270	4040
	TH	L	W		850	1050	1300	1700	2100	2350	2650	3310	3610
	SH		W		540	660	810	1050	1290	1470	1650	2050	2235
Heating capacity	H	W	3200	4100	5000	6500	8100	9100	10200	12600	13500		
	M	W	2300	2960	3600	4680	5840	6560	7340	8980	9620		
	L	W	1360	1680	2080	2720	3360	3760	4240	5290	5670		
Noise		High speed	dB(A)	31	37	40	40	43	43	46	47	48	
Power input		High speed	W	21	28	32	37	45	55	64	75	85	
Waterflow volume		High speed	m³/h	0.34	0.43	0.53	0.68	0.85	0.95	1.07	1.32	1.44	
Pressure dropping		kPa	14	21	26	25	28	35	38	38	40		
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Coil			Hydrophilic aluminum fin to wear copper tube										
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6		
Condensing water pipe		mm	ø 26										
Net dimension		L×W×H	mm	700×470×200	700×470×200	700×470×200	900×470×200	900×470×200	1100×470×200	1100×470×200	1300×470×200		
Net weight		kg	15.5	15.5	16.2	18.5	18.5	22.1	22.1	26.5	27.5		


Medium static pressure ducted type fan coil unit

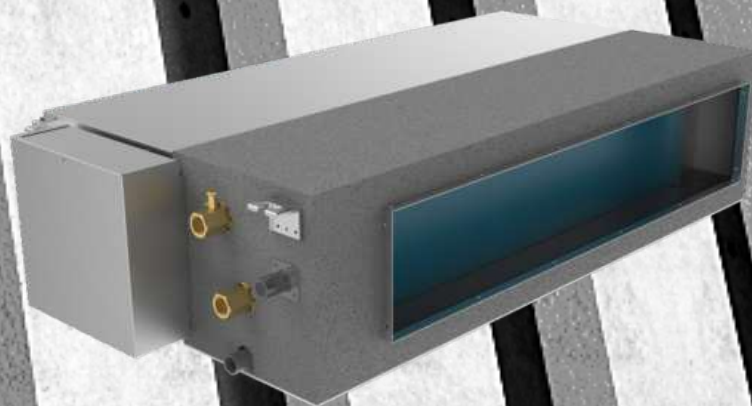

Characteristic

- 1: Classical elegant design
Aluminized zinc plate **galvanized sheet, beautiful appearance**,High corrosion resistance.
- 2: Medium static pressure,long distance air supply
the static pressure is Max.75Pa,and Min .30Pa
- 3: Big diameter fan,big air volume,low noise
- 4: E-heater is optional
- 5: Fresh air can be input from outside(optional)
- 6 ☐ DC brushless motor is standard
- 7 ☐ circular air duct interface is optional






standard



Optional



Installing dimension

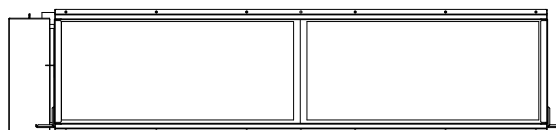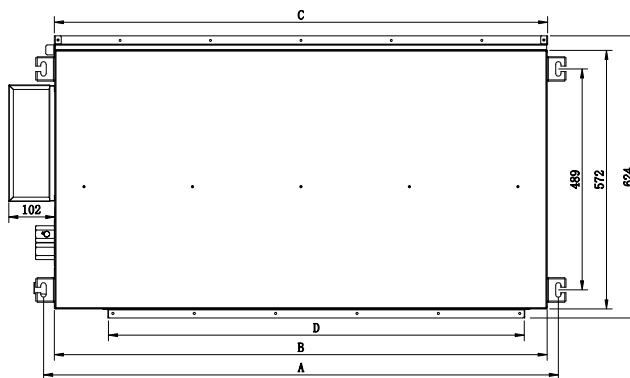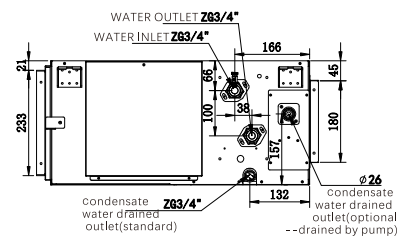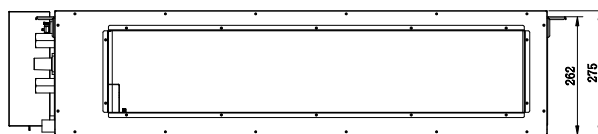

unit:mm

Air volume (m ³ /h)	1020/1360	1700/2040	2380/2720
A	1139	1400	1660
B	1089	1350	1610
C	1089	1350	1610
D	920	1181	1441

► Medium static pressure duct type fan coil unit performance (2-tube system)

Model (2-tube system)			DC-MFP-102MAW	DC-MFP-136MAW	DC-MFP-170MAW	DC-MFP-204MAW	DC-MFP-238MAW	DC-MFP-272MAW		
Power supply			220V, 50Hz, 1Ph							
Air volume		H	m³/h	1020	1360	1700	2040	2380	2720	
		L		360	480	600	720	840	960	
Static pressure			Pa	75						
Cooling capacity	TH	H	W	6600	8200	10200	11900	13900	15100	
			BTU/h	22545	28011	34843	40650	47482	51582	
	SH		H	W	5000	6200	7700	8900	10400	11300
				BTU/h	17080	21179	26303	30402	35526	38600
	TH	L	W	2800	3400	4300	5000	5800	6300	
			SH <td>W</td> <td>2000</td> <td>2500</td> <td>3100</td> <td>3600</td> <td>4200</td> <td>4600</td>	W	2000	2500	3100	3600	4200	4600
Heating capacity	H		W	10600	13200	16400	19200	22400	24300	
	L		W	4500	5500	6900	8100	9300	10100	
Noise	High speed		dB(A)	48	50	54	56	58	60	
Power input		High speed	W	110	155	200	230	270	310	
Waterflow volume		High speed	m³/h	1.13	1.4	1.74	2.03	2.37	2.58	
Pressure dropping			kPa	25	30	32	35	40	55	
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Coil		Type	Hydrophilic aluminum fin to wear copper tube							
Maximum working pressure			MPa	1.6	1.6	1.6	1.6	1.6	1.6	
Condensing water pipe			mm	DN20(External thread)						
Net dimension	L×W×H		mm	1090×624×275	1090×624×275	1350×624×275	1350×624×275	1610×624×275	1610×624×275	
Net weight			kg	35	35	40	40	45	45	

► Medium static pressure duct type fan coil unit performance (4-tube system)

Model (2-tube system)			DC-MFP-102MAW	DC-MFP-136MAW	DC-MFP-170MAW	DC-MFP-204MAW	DC-MFP-238MAW	DC-MFP-272MAW	
Power supply			220V,50Hz,1Ph						
Air volume		H	1020	1360	1700	2040	2380	2720	
		L	360	480	600	720	840	960	
Static pressure		Pa	60						
Cooling capacity	TH	H	W	6600	8200	10200	11900	13900	15100
			BTU/h	22545	28011	34843	40650	47482	51582
	SH	H	W	5000	6200	7700	8900	10400	11300
			BTU/h	17080	21179	26303	30402	35526	38600
	TH	L	W	2800	3400	4300	5000	5800	6300
			W	2000	2500	3100	3600	4200	4600
Heating capacity	H		W	6700	8300	10300	12100	14100	15300
	L		W	2800	3500	4300	5100	5900	6400
Noise	High speed		dB(A)	48	50	54	56	58	60
Power input		High speed	W	110	155	200	230	270	310
Waterflow volume	Cooling	m³/h	1.13	1.4	1.74	2.03	2.37	2.58	
	Heating	m³/h	0.74	0.91	1.13	1.33	1.55	1.68	
Pressure dropping	Cooling	kPa	25	30	32	35	40	55	
	Heating	kPa	20	25	27	29	30	37	
Water tube connection(cooling)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Water tube connection(heating)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Coil		Type	Hydrophilic aluminum fin to wear copper tube						
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	
Condensing water pipe			mm	DN20(External thread)					
Net dimension	L×W×H	mm	1090×624×275	1090×624×275	1350×624×275	1350×624×275	1610×624×275	1610×624×275	
Net weight		kg	37	37	42	42	47	47	


High static pressure ducted type fan coil unit



Characteristic

- 1: Classical elegant design
No-spangle galvanized sheet, beautiful appearance
- 2: High static pressure, long distance air supply
the static pressure is Max.200Pa, and Min. 120Pa
- 3: Big diameter fan, big air volume, low noise
- 4: E-heater is optional
- 5: Fresh air can be input from outside

Installing dimension

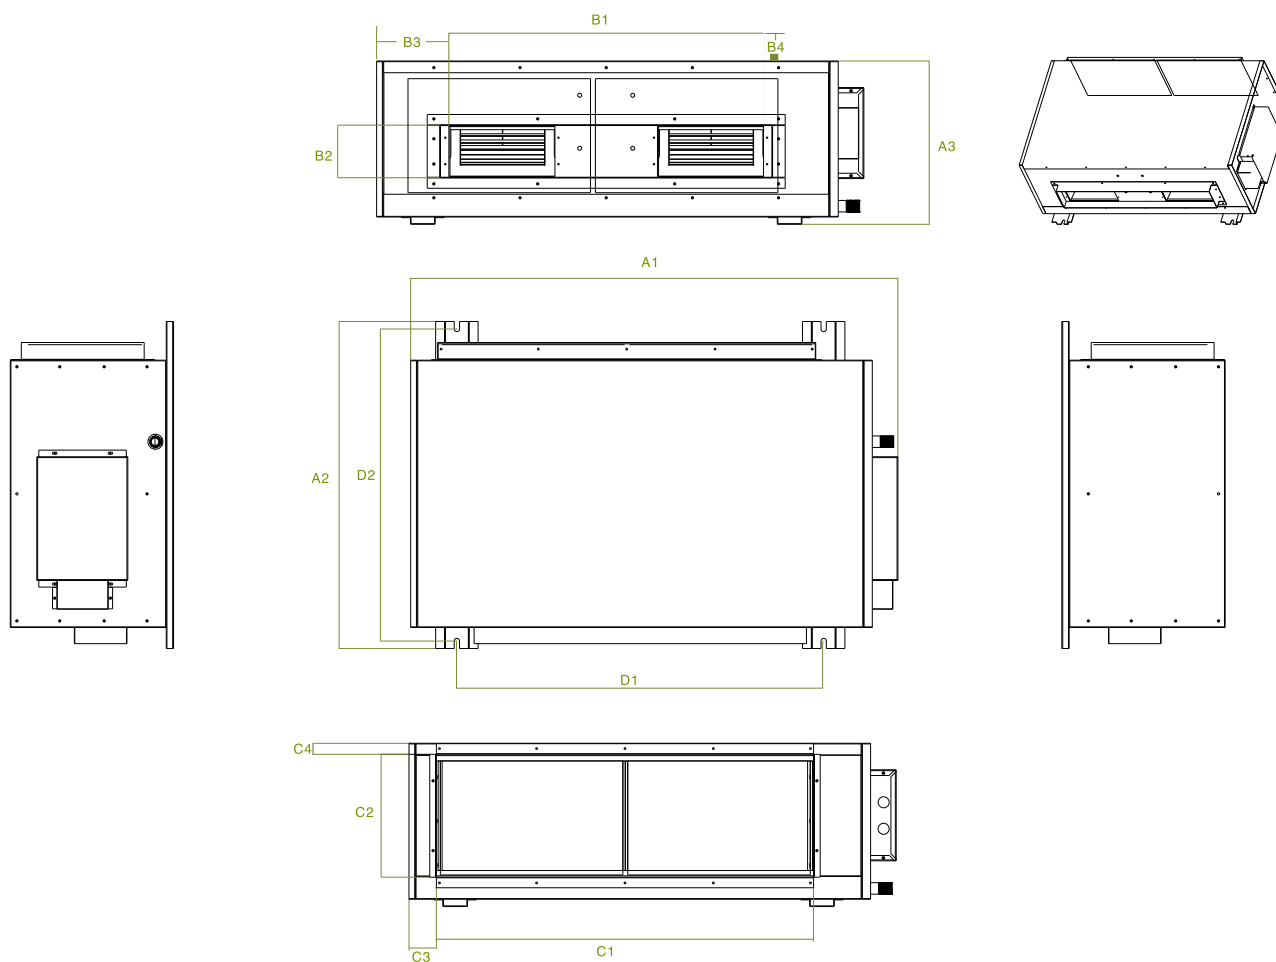

Model	Length	Width	height	length of air outlet connection	height of air outlet connection	distance from air outlet to left side of unit	distance from air outlet to top side of unit	length of air inlet connection	height of air inlet connection	distance from air inlet to left side of unit	distance from air inlet to top side of unit	Dimension1 of installing frame	Dimension2 of installing frame
Dimension (mm)	A1	A2	A3	B1	B2	B3	B4	C1	C2	C3	C4	D1	D2
MFP-170/204/238HA	1103	740	370	753	119	149	144	855	263	61	40	831	706

Model (2-tube system)			MFP-170HA	MFP-204HA	MFP-238HA	
Power supply			220V,50Hz,1Ph			
Air volume	H	m³/h	1700	2040	2380	
	M		1280	1550	1800	
	L		860	1050	1280	
Static pressure		Pa	120	100	80	
Cooling capacity	TH	H	W	9000	10800	12600
			BTU/h	30708	36850	42991
			W	6705	8046	9387
	SH	H	BTU/h	22877	27453	32028
			W	7290	8748	10206
			SH	W	5759	6911
	TH	M	W	5670	6804	7938
			SH	W	4649	5579
Heating capacity	H		W	13500	16200	18900
	M		W	10395	12474	14553
	L		W	8168	9801	11435
Noise	High speed		dB(A)	50	52	54
Power input		High speed	W	420	450	520
Waterflow volume		High speed	m³/h	1.54	1.85	2.16
Pressure dropping			kPa	22	30	36
Water tube connection(inlet)			ZG7/4"	ZG7/4"	ZG7/4"	
Water tube connection(outlet)			ZG7/4"	ZG7/4"	ZG7/4"	
Coil			Type	Hydrophilic aluminum fin to wear copper tube		
Maximum working pressure			MPa	1.6	1.6	1.6
Condensing water pipe			mm	DN20(External thread)		
Net dimension	L×W×H		mm	1110×740×370	1110×740×370	1110×740×370
Net weight			kg	55	56	65

High static pressure ducted type
fan coil unit (2-tube system)


Model (4-tube system)			MFP-170HA4	MFP-204HA4	MFP-238HA4	
Power supply			220V,50Hz,1Ph			
Air volume	H	m³/h	1700	2040	2380	
	M		1280	1550	1800	
	L		860	1050	1280	
Static pressure		Pa	120	100	80	
Cooling capacity	TH	H	W	9000	10800	12600
			BTU/h	30708	36850	42991
			W	6705	8046	9387
	SH	M	BTU/h	22877	27453	32028
			W	7290	8748	10206
			W	5759	6911	8063
	TH	L	W	5670	6804	7938
	SH		W	4649	5579	6509
Heating capacity	H		W	6500	7800	9100
	M		W	5090	6110	7130
	L		W	4080	4900	5720
Noise	High speed		dB(A)	50	52	54
Power input		High speed	W	420	450	520
Waterflow volume		High speed	Cooling tube	1.54	1.85	2.16
			Heating tube	0.56	0.68	0.79
Pressure dropping		High speed	Cooling tube	22	30	36
			Heating tube	9	12	15
Water tube connection(inlet)			ZG7/4"	ZG7/4"	ZG7/4"	
Water tube connection(outlet)			ZG7/4"	ZG7/4"	ZG7/4"	
Coil			Type	Hydrophilic aluminum fin to wear copper tube		
Maximum working pressure			MPa	1.6	1.6	1.6
Condensing water pipe			mm	DN20(External thread)		
Net dimension	L×W×H		mm	1110*740*370	1110*740*370	1110*740*370
Net weight			kg	57	58	68

High static pressure ducted type
fan coil unit (4-tube system)



Characteristic

- 1: Classical elegant design
No-spangle galvanized sheet, beautiful appearance
- 2: High static pressure, long distance air supply
the static pressure is 120Pa
- 3: Big diameter fan, big air volume, low noise
- 4: E-heater is optional
- 5: Fresh air can be input from outside

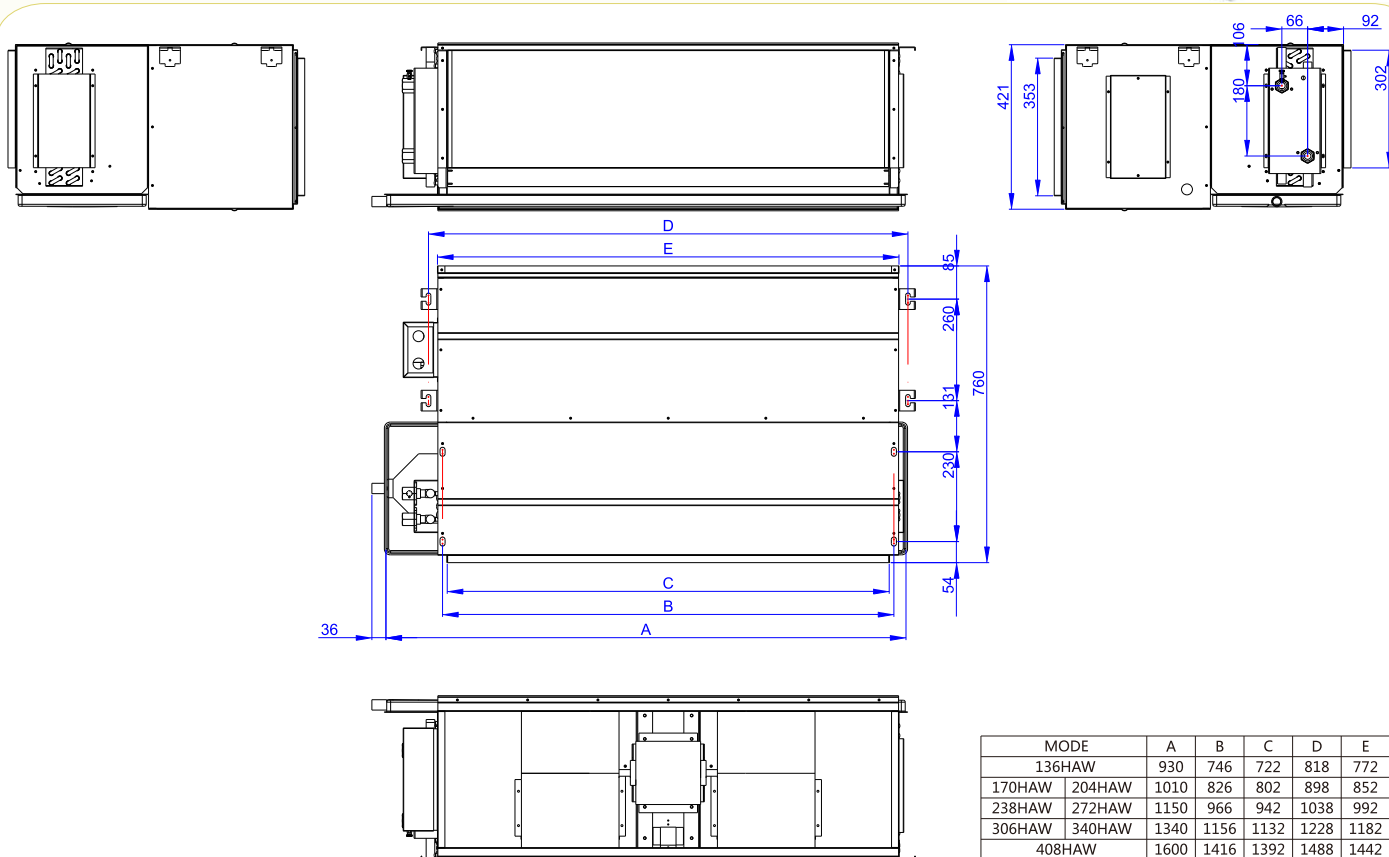

Model (2-tube system)			MFP-136HAW	MFP-170HAW	MFP-204HAW	MFP-238HAW	MFP-272HAW	MFP-306HAW	MFP-340HAW	MFP-340HAW			
Power supply			220V,50Hz,1Ph										
Air volume	H	m³/h	1360	1700	2040	2380	2720	3060	3400	4080			
	M		1090	1360	1635	1900	2180	2450	2720	3260			
	L		815	1020	1225	1430	1630	1830	2040	2450			
Static pressure		Pa	120	120	120	120	120	120	120	120			
Cooling capacity	TH	H	W	7200	9000	10800	12600	14400	16200	18000	21600		
			BTU/h	24600	30750	36900	43050	49200	55350	61500	73800		
			SH	M	W	5350	6650	8000	9350	10650	12000	13350	16000
					BTU/h	18300	22700	27350	31950	36400	41000	45600	54650
	TH	L			W	5450	6800	8150	9500	10850	12250	13600	16300
					W	3900	4900	5850	6850	7800	8800	9800	11750
			TH	W	4200	5250	6300	7350	8400	9450	10500	12600	
			SH	W	2950	3700	4450	5200	5950	6650	7400	8900	
Heating capacity	H		W	10800	13500	16200	18900	21600	24300	27000	32400		
	M		W	8200	10250	12300	14350	16400	18450	20500	24600		
	L		W	7000	8800	10550	12300	14050	15800	17550	21050		
Noise	High speed		dB(A)	51	51	52	54	54	56	56	57		
Power input		High speed	W	380	420	450	520	550	880	900	1100		
Waterflow volume		High speed	m³/h	1.23	1.54	1.85	2.16	2.46	2.77	3.08	3.70		
Pressure dropping			kPa	25	28	30	35	36	42	43	50		
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"			
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"			
Coil		Type	Hydrophilic aluminum fin to wear copper tube										
Maximum working pressure			MPa	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6		
Condensing water pipe			mm	DN20(External thread)									
Net dimension	L×W×H		mm	970×760×425	1050×760×425	1050×760×425	1190×760×425	1190×760×425	1380×760×425	1380×760×425	1640×760×425		
Net weight			kg	47	49	50	54	55	60	61	80		

HAW series high static pressure ducted type fan coil unit (2-tube system)

Model (4-tube system)			MFP-136HAW4	MFP-170HAW4	MFP-204HAW4	MFP-238HAW4	MFP-272HAW4	MFP-306HAW4	MFP-340HAW4	MFP-408HAW4		
Power supply												
Air volume	H	m³/h	1360	1700	2040	2380	2720	3060	3400	4080		
	M		1090	1360	1635	1900	2180	2450	2720	3260		
	L		815	1020	1225	1430	1630	1830	2040	2450		
Static pressure		Pa	100	100	100	100	100	100	100	100		
Cooling capacity	TH	H	W	7200	9000	10800	12600	14400	16200	18000	21600	
			BTU/h	24600	30750	36900	43050	49200	55350	61500	73800	
			M	W	5350	6650	8000	9350	10650	12000	13350	16000
				BTU/h	18300	22700	27350	31950	36400	41000	45600	54650
	L	W		5450	6800	8150	9500	10850	12250	13600	16300	
		W		3900	4900	5850	6850	7800	8800	9800	11750	
		W	4200	5250	6300	7350	8400	9450	10500	12600		
		W	2950	3700	4450	5200	5950	6650	7400	8900		
Heating capacity	H		W	4600	5760	6900	8050	9200	10400	11500	13800	
	M		W	3500	4400	5250	6150	7000	7900	8750	10500	
	L		W	3000	3750	4500	5250	6000	6750	7500	9000	
Noise	High speed		dB(A)	51	51	52	54	54	56	56	57	
Power input		High speed	W	380	420	450	520	550	880	900	1100	
Waterflow volume		High speed	Cooling tube	m³/h	1.23	1.54	1.85	2.16	2.46	2.77	3.08	3.70
			Heating tube		0.53	0.66	0.79	0.92	1.06	1.19	1.32	1.58
Pressure dropping			Cooling tube	kPa	25	28	30	35	36	42	43	50
			Heating tube		12	12	14	17	18	21	22	27
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"		
Coil		Type										
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6		
Condensing water pipe												
Net dimension	L×W×H		mm	970*760*425	1050*760*425	1050*760*425	1190*760*425	1190*760*425	1380*760*425	1380*760*425	1640*760*425	
Net weight		kg	49	51	52	56	57	63	64	84		



HAW series high static pressure ducted type fan coil unit (4-tube system)

Universal type fan coil unit




Characteristic

- 1、 Universal design, the unit can be installed by vertical or horizontal.
- 2、 Classical elegant design.
- 3、 Use PVC drain pan with 2 water outlet, hollow structure design can enhance the thermal insulation properties, at the same time to prevent from leaking.
- 4、 Left-Right water pipe connection can be changed freely.
- 5、 6 kind of air distribution solution is optional ;

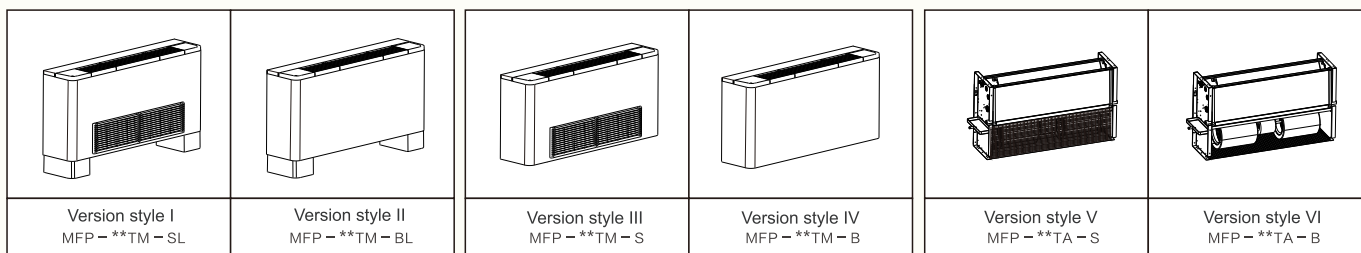

Installing dimension

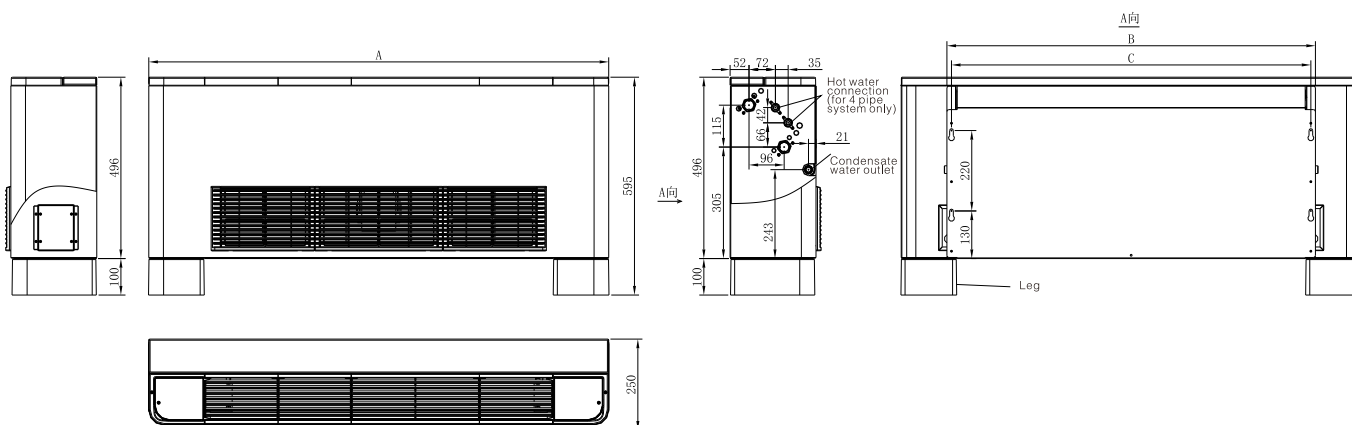

Unit: mm

MODEL	MFP-34TM	MFP-51TM	MFP-68TM	MFP-85TM	MFP-102TM	MFP-136TM	MFP-170TM	MFP-204TM	MFP-238TM
A	858	908	1058	1208	1258	1608	1758	1908	2058
B	608	658	808	958	1008	1358	1508	1658	1808
C	583	633	783	933	983	1333	1483	1633	1783
Qty of fan	1	2	2	2	2	4	4	4	4
Qty of motor	1	1	1	1	1	2	2	2	2

Universal type fan coil unit (2-tube system)

Model			MFP-34TM	MFP-51TM	MFP-68TM	MFP-85TM	MFP-102TM	MFP-136TM	MFP-170TM	MFP-204TM	MFP-238TM	
Power supply			220V,50Hz, 1Ph									
Air volume	H	m³/h	340	510	680	850	1020	1360	1700	2040	2380	
	M		260	390	510	640	770	1020	1280	1530	1790	
	L		170	260	340	430	510	680	850	1020	1190	
Cooling capacity	TH	H	W	1800	2700	3600	4500	5400	7200	9000	10800	12600
			BTU/h	6142	9212	12283	15354	18425	24566	30708	36850	42991
			W	1368	2052	2736	3420	4103	5471	6839	8207	9575
	SH	H	BTU/h	4668	7001	9335	11669	13999	18667	23335	28002	32670
			W	1494	2242	2989	3736	4483	5978	7472	8967	10461
			W	1181	1771	2362	2952	3541	4722	5903	7084	8265
	TH	M	W	1162	1744	2325	2906	3487	4649	5812	6974	8136
			W	953	1430	1907	2383	2860	3813	4765	5718	6672
			W	2700	4050	5400	6750	8100	10800	13500	16200	18900
Heating capacity	M	W	2131	3197	4262	5328	6393	8524	10655	12786	14917	
	L		1675	2511	3349	4186	5024	6697	8372	10046	11721	
	W		1675	2511	3349	4186	5024	6697	8372	10046	11721	
Noise	High speed	dB(A)	37	39	41	43	45	46	48	50	51	
Power input	High speed	W	37	52	62	76	96	134	152	189	228	
Waterflow volume	High speed	m³/h	0.31	0.46	0.62	0.77	0.93	1.23	1.54	1.85	2.16	
Pressure dropping		kPa	7	15	18	23	28	30	22	30	36	
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Water tube connection(outlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Coil		Type	high efficient copper pipe to wear Hydrophilic aluminum coil									
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	
Condensation pipe size (diameter)		mm	ø 16									

Universal type fan coil unit (4-tube system)

Model			MFP-34TM4	MFP-51TM4	MFP-68TM4	MFP-85TM4	MFP-102TM4	MFP-136TM4	MFP-170TM4	MFP-204TM4	MFP-238TM4	
Power supply			220V,50Hz,1Ph									
Air volume	H	m³/h	340	510	680	850	1020	1360	1700	2040	2380	
	M		260	390	510	640	770	1020	1280	1530	1790	
	L		170	260	340	430	510	680	850	1020	1190	
Cooling capacity	TH	H	W	1800	2700	3600	4500	5400	7200	9000	10800	12600
			BTU/h	6142	9212	12283	15354	18425	24566	30708	36850	42991
			W	1368	2052	2736	3420	4103	5471	6839	8207	9575
	SH	H	BTU/h	4668	7001	9335	11669	13999	18667	23335	28002	32670
			W	1494	2242	2989	3736	4483	5978	7472	8967	10461
			W	1181	1771	2362	2952	3541	4722	5903	7084	8265
	TH	M	W	1162	1744	2325	2906	3487	4649	5812	6974	8136
			W	953	1430	1907	2383	2860	3813	4765	5718	6672
			W	1300	1940	2590	3240	3890	5180	6480	7780	9070
Heating capacity	H	W	1020	1530	2040	2550	3060	4070	5090	6110	7130	
	M		820	1230	1630	2040	2450	3270	4080	4900	5720	
	L											
Noise	High speed	dB(A)	37	39	41	43	45	46	48	50	51	
Power input	High speed	W	37	52	62	76	96	134	152	189	228	
Waterflow volume	High speed	Cooling tube	m³/h	0.31	0.46	0.62	0.77	0.93	1.23	1.54	1.85	2.16
		Heating tube		0.11	0.17	0.22	0.28	0.34	0.45	0.56	0.67	0.78
Water Pressure dropping		Cooling tube	kPa	7	15	18	23	28	30	22	30	36
		Heating tube		2.8	6	7.2	9.2	11.2	12	8.8	12	14.4
Water tube connection(inlet)			ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	ZG3/4"	
Water tube connection(outlet)			ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"	
Coil		Type	high efficient copper pipe to wear Hydrophilic aluminum coil									
Maximum working pressure		MPa	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	
Condensation pipe size (diameter)		mm	ø 16									

Ultra thin vertical type fan coil unit




Characteristic


- 1、Ultra thin design the width of the body is only 145mm;
- 2、Modern industrial style design, exquisite manufacturing technology and elegant surface. It is cater to modern decoration style;
- 3、Using the cross flow fan, optimization of pipeline design. Strong wind and quiet running.
- 4、Auto swing.The air louver can swing by operate the remote controller.
- 5、Remote controller is standard to convenient the using.
- 6、Cold wind protection system. It can stop the cold wind blow out when the water temperature in the pipe is too cold.
- 7、Left/right water pipe can be customized.
Easy for installing work and reduce the dependence on inventory.
- 8、The side metal plate can be remove before installation which make pipe connection easier.
- 9、The filter of this product is easy to change.
- 10、2-way valve and 3-way valve is optional to built-in which can decrease the cost of installation.
- 11、Installed by floor standing with leg ,or hanged on the wall without leg.
- 12、485 communication, linkage dry contact for chiller is standard for easy controlling;
- 13、fan speed can be adjust by dip switch onside PCB,the air volume can be changed accordingly ;
- 14、DC motor is optional to have higher efficiency;



Installing dimension(Conceal style ,vertical & horizontal)

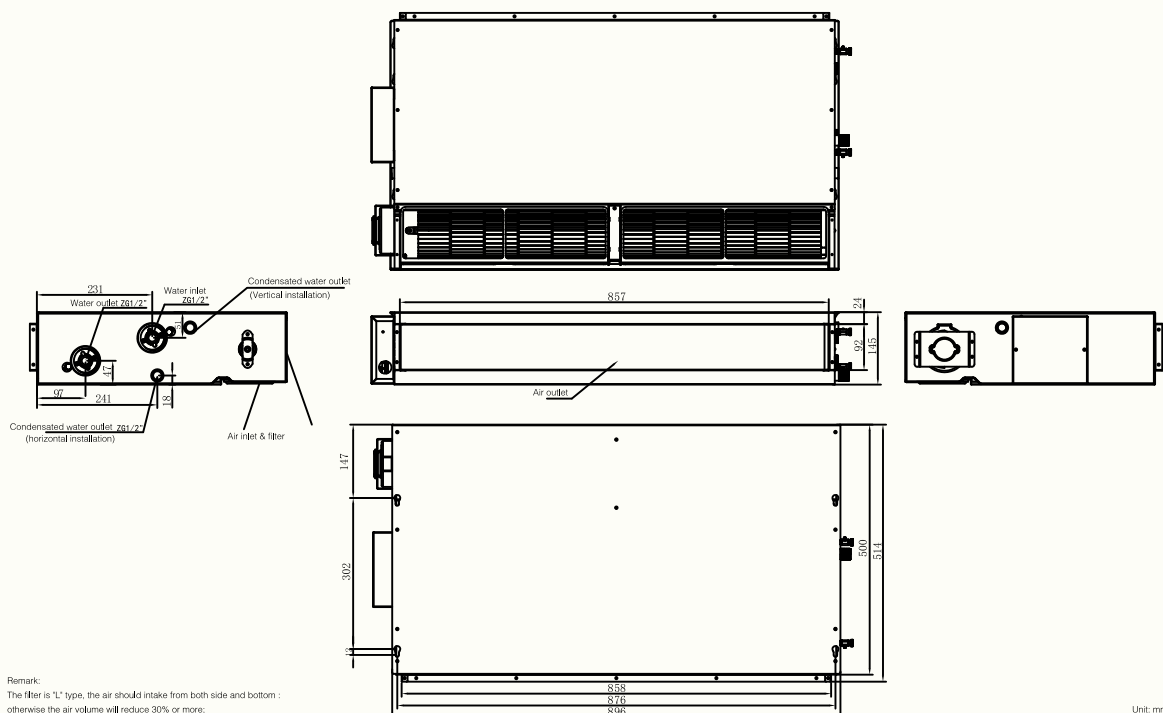

▶ Installing dimension(Decorative style ,Vertical installation only)

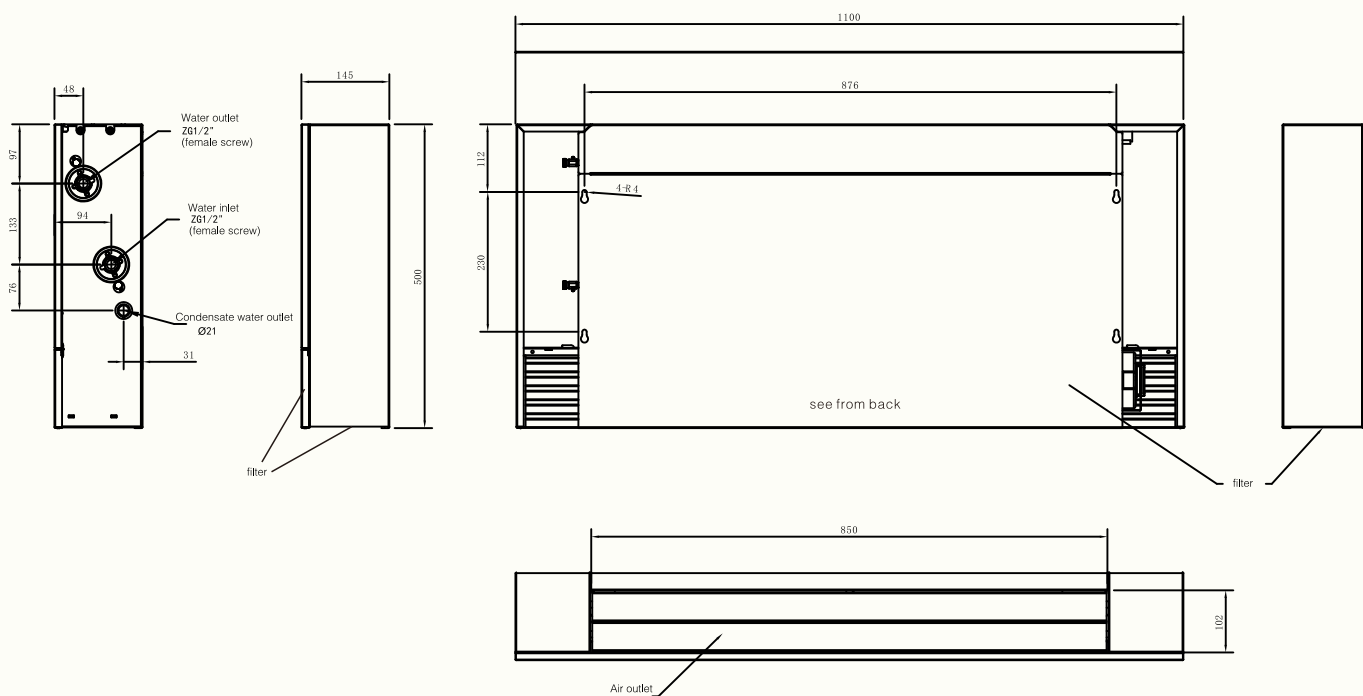

unit:(mm)

▶ Ultra thin fan coil unit (2-tube system)

Model			MFP-30CM-B	MFP-40CA-B	MFP-50CA-B	MFP-60CA-B	
			MFP-30CA-B	MFP-40CM-B	MFP-50CM-B	MFP-60CM-B	
Power supply			220V,50Hz,1Ph				
Air volume		H	m³/h	300	400	500	600
		M		220	300	380	450
		L		160	230	290	340
Static pressure		Pa	0	0	0	0	
Cooling capacity	TH	H	W	1800	2400	3100	3700
			BTU/h	6149	8198	10590	12640
		M	W	1450	1900	2500	2900
		L	W	1180	1500	1950	2300
Heating capacity		H	W	2900	3800	5000	5900
		M	W	2300	3050	4000	4650
		L	W	1900	2400	3100	3700
Noise		High speed	dB(A)	36	38	41	43
Power input		High speed	W	35	45	55	65
Waterflow volume		High speed	m³/h	0.31	0.41	0.53	0.64
Pressure dropping			kPa	18	20	26	28
Water tube connection(inlet)				ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"
Water tube connection(outlet)				ZG1/2"	ZG1/2"	ZG1/2"	ZG1/2"
Coil				Hydrophilic aluminum fin to wear copper tube			
Maximum working pressure			MPa	1.6	1.6	1.6	1.6
Condensing water pipe			mm	ø21			
Net dimension	Decorative	L×W×H	mm	1100×145×500			
	Conceal	L×W×H	mm	896×145×515			

Slim ducted type fan coil unit




Characteristic

- 1、Slim FCU body is specially designed for limited space;
- 2、The round air inlet and outlet , make the installation easily;
- 3、DC brushless motor is stadard to adjust the static pressure;
- 4、Reasonable structure design makes it more convenient to replace the filter and daily maintenance;
- 5、Condensated water drained pump is optional to save the space of ceiling;
- 6、The shell adopts aluminum zinc plate, which greatly improves the corrosion resistance;




Performance of Slim duct type fan coil unit


Model			DC3-MTF-30KB	DC3-MTF-60KB	
Power supply			220V~ 50Hz	220V~ 50Hz	
Air volume	H	m³/h	300	600	
	M		180	360	
	L		100	200	
Static pressure		Pa	12-50	12-50	
Cooling capacity	TH	H	W	1800	3600
			BTU/h	6142	12283
			W	1301	2600
	SH	M	BTU/h	4439	8871
			W	1300	2630
			W	950	1945
Heating capacity	TH	L	W	765	1550
			W	485	990
			W	2900	5800
	M	W	2080	4180	
		W	1235	3490	
		L	W	1235	3490
Noise	High speed		dB(A)	34	36
Power input		High speed	W	20	40
Waterflow volume		High speed	m³/h	0.31	0.62
Pressure dropping			kPa	21	30
Water tube connection(inlet)			ZG3/4"	ZG3/4"	
Water tube connection(outlet)			ZG3/4"	ZG3/4"	
Coil		style	Hydrophilic aluminum fin to wear copper tube		
Maximum working pressure			MPa	1.6	1.6
Condensing water pipe			mm	ø26mm	ø26mm
Net dimension		L×W×H	mm	580×420×235	580×710×235
Net weight			kg	16.5	21.5

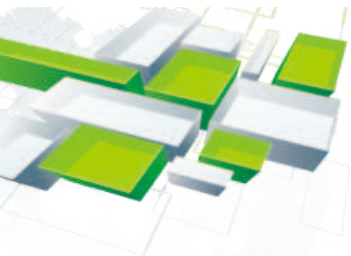

▶ Installing dimension

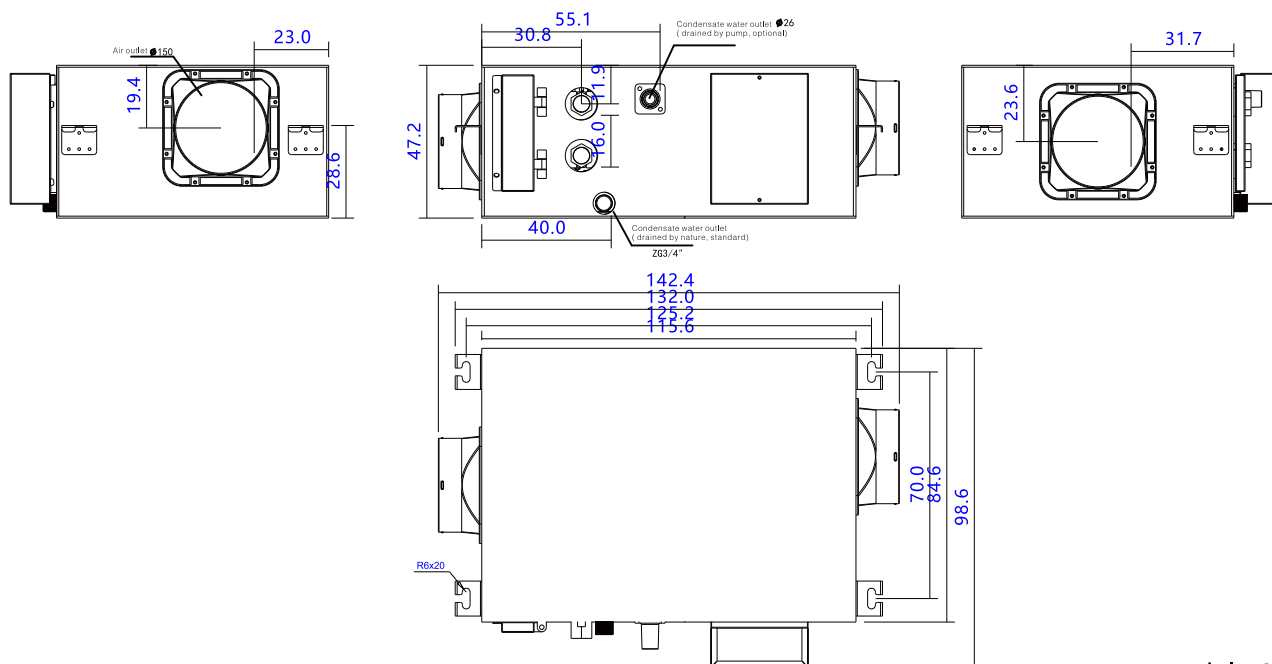

model: MTF-30KB

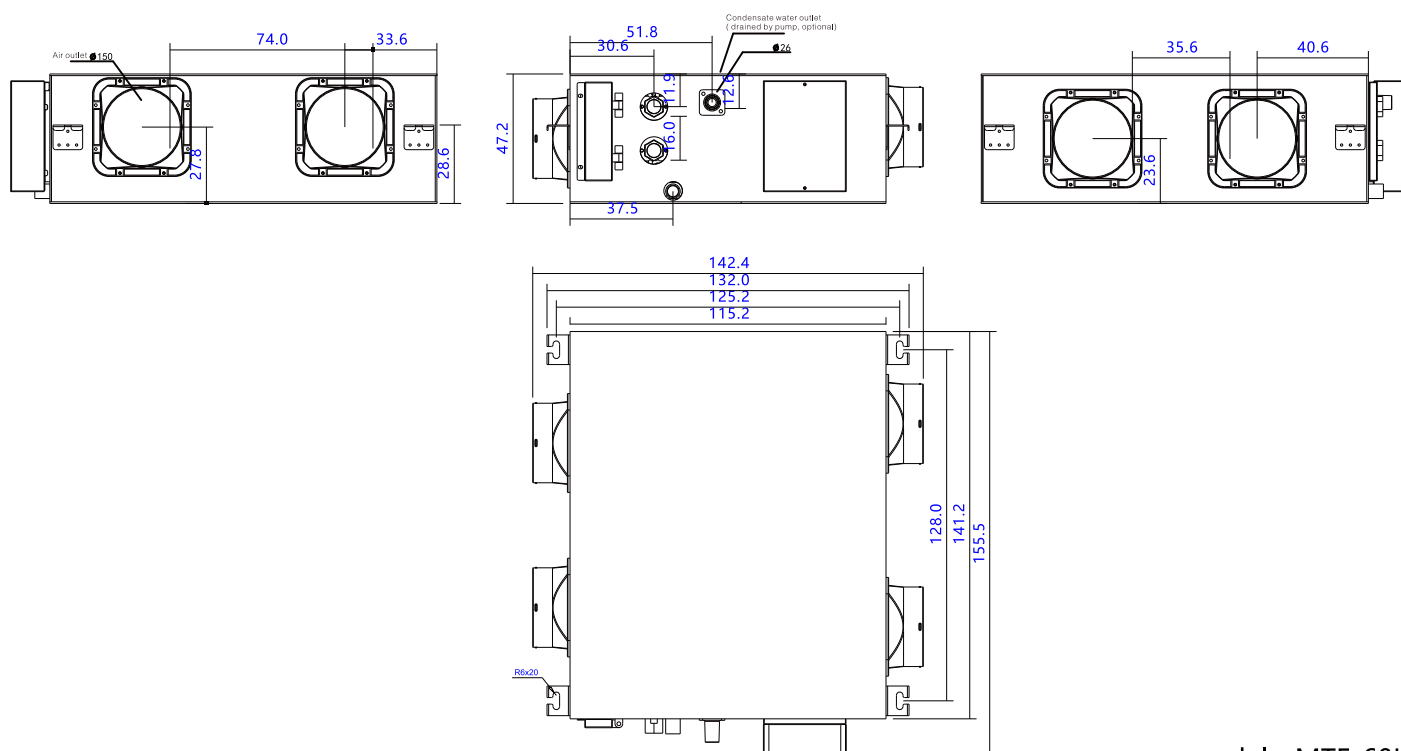


model: MTF-60KB

Vertical ducted conceal type fan coil unit




Characteristic

1. Classical elegant design
No-spangle galvanized sheet, beautiful appearance (Aluminum-galvanized sheet is optional)
2. High static pressure
The static pressure is 60Pa, and can change the static pressure from 30Pa to 100Pa(Max.)
3. Big diameter fan, big air volume, low noise
4. E-heater is optional
5. DC motor is standard
6. Fan motor parts is easy for maintenance
The fan was fix by bolts which connected with the riveting structure on the fan, it is easy to remove the bolt and make maintenance of the fan motor parts.
7. Coil assemble parts is easy for maintenance
Use stainless steel soft connection pipe, the coil parts can be easily taken out by release 4 screws and loose the middle connection between coil and soft pipe.
8. Stop valve\Modulating valve\etc can be built-in the FCU, it can reduce the job of installation.

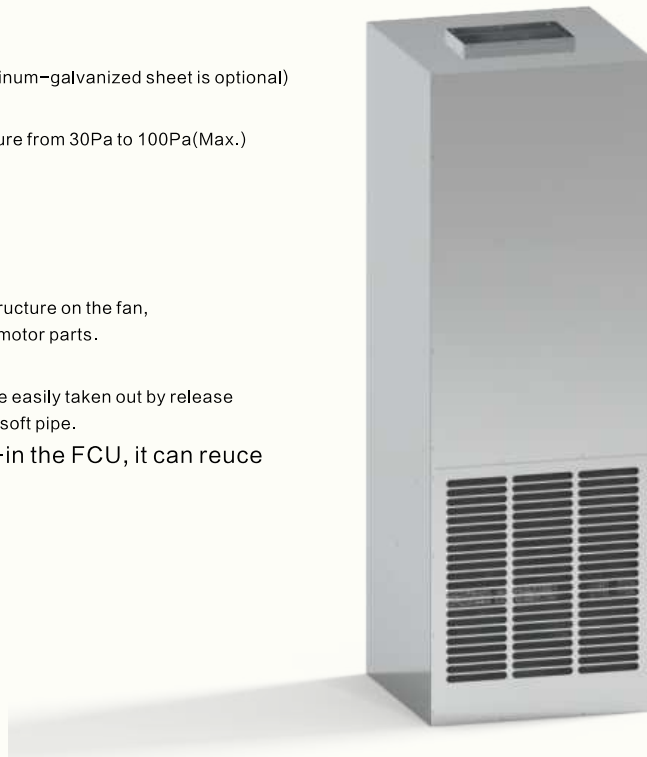

Installing dimension

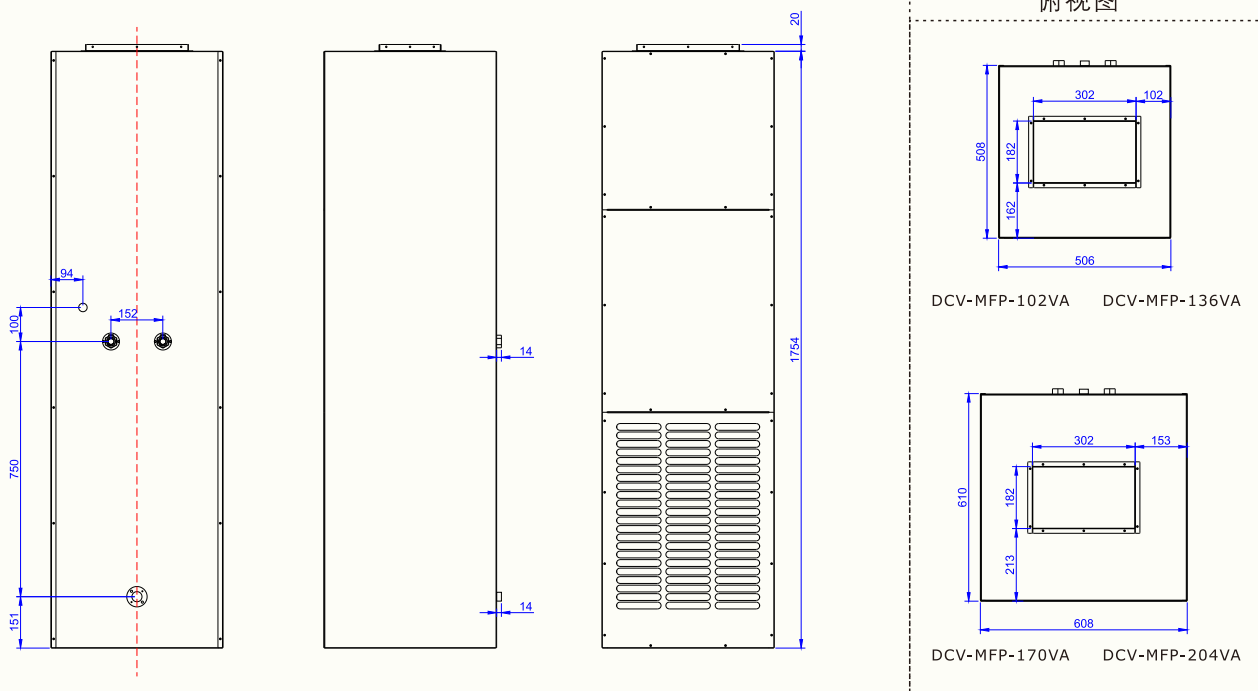

Performance


Model			DCV-MFP-102VA	DCV-MFP-136VA	DCV-MFP-170VA	DCV-MFP-204VA	
Power supply			220V,50Hz,1Ph				
Air volume		H	m³/h	1020	1360	1700	2040
		M		240	320	400	480
Static pressure			Pa	60	60	60	60
Cooling capacity	TH	H	W	6300	8100	10000	11500
			BTU/h	21500	27640	34120	39240
	SH		W	4490	5870	7100	8350
			BTU/h	15320	20030	24225	28490
	TH	L	W	2200	2850	3500	4050
			W	1300	1650	2050	2350
Heating capacity	H		W	10100	13000	16000	18400
	L		W	3550	4555	5600	6450
Noise	High speed		dB(A)	44	48	52	55
Power input		High speed	W	220		280	440
Waterflow volume		High speed	m³/h	1.07	1.38	1.71	1.96
Pressure dropping			kPa	27	30	35	40
Water tube connection(inlet)			ZG3/4"		ZG3/4"	ZG3/4"	ZG3/4"
Water tube connection(outlet)			ZG3/4"		ZG3/4"	ZG3/4"	ZG3/4"
Coil			style	Hydrophilic aluminum fin to wear copper tube			
Maximum working pressure			MPa	1.6	1.6	1.6	1.6
Condensing water pipe			mm	ø21			
Net dimension	L×W×H		mm	506×508×1774			608×610×1774
Net weight			kg	75.6			82.8

DC brushless motor type fan coil unit





DC3 motor type fan coil unit (3 speed)

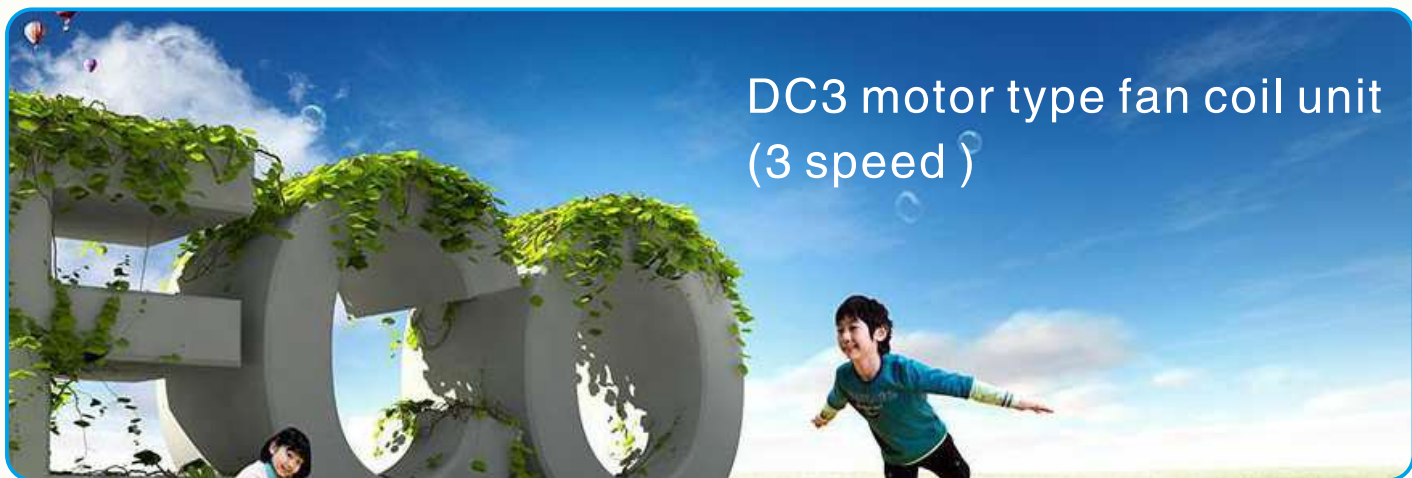

Characteristic

- 1、 Use the 3(5) speed DC motor, normal thermostat is fitable for controlling;
- 2、 Use DC motor , with high efficiency and low energy consumption.
The energy consumption of DC motor is average more than 50% AC motor.
- 3、 Long running life

The energy consumption for motor is changed to energy for running and heat,efficiency of AC motor is always 40–45%, it means that there have 55%–60% energy was tranfered to heat.

The heat might cause to the Aging of components, which is harm to the life of motor.

The efficiency of DC brushless motor is always more than 80%–95%, so only little energy change to heat.

DC3 fan coil product range




DCV motor type fan coil unit (0~10V signal)



Characteristic

- 1、Use the stepless DC motor, fit special controller(cassette/ultra thin style), or 0~10V fan coil thermostat ;
- 2、Use Panasonic DC motor, high efficiency and low energy consumption.
The energy consumption of DC motor is average more than 60% compare to AC motor.

Energy consumption	Speed 1	Speed 2	Speed 3	Speed 4
AC motor	146W	106W	75W	56W
DC motor	72W	41W	25W	12W
Energy saving	50.7%	61.3%	66.7%	78.6%

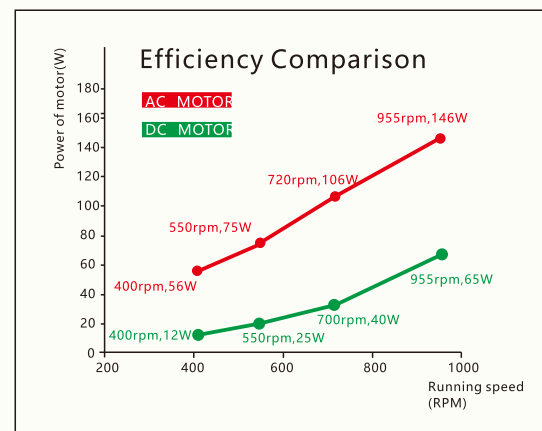

3、Long running life

The energy consumption for motor is changed to energy for running and heat, efficiency of AC motor is always 40–45%, it means that there have 55%–60% energy was tranfered to heat.

The heat might cause to the Aging of components, which is harm to the life of motor.


The efficiency of DC brushless motor is always more than 80%–95%, so only little energy change to heat.

4、Fast cooling/heating & comfortable temperature controlling

If the room temperature have a big distance to the setting temperature, for normal AC style FCU, the fan will run under the setting speed. While the DC style will automatic running at high speed to fast the cooling/heating.

When the room temperature arrived the setting temperature, the AC model style will stop the fan running or close the water valve, it will cause the cooling/heating can not continue and also the temperature shock in the room;

While the DC style will change the running speed according the temperature distance between the room temperature and the setting temperature, if the distance is big, the fan speed will be higher, and if the distance is smaller, the running speed will reduce too.

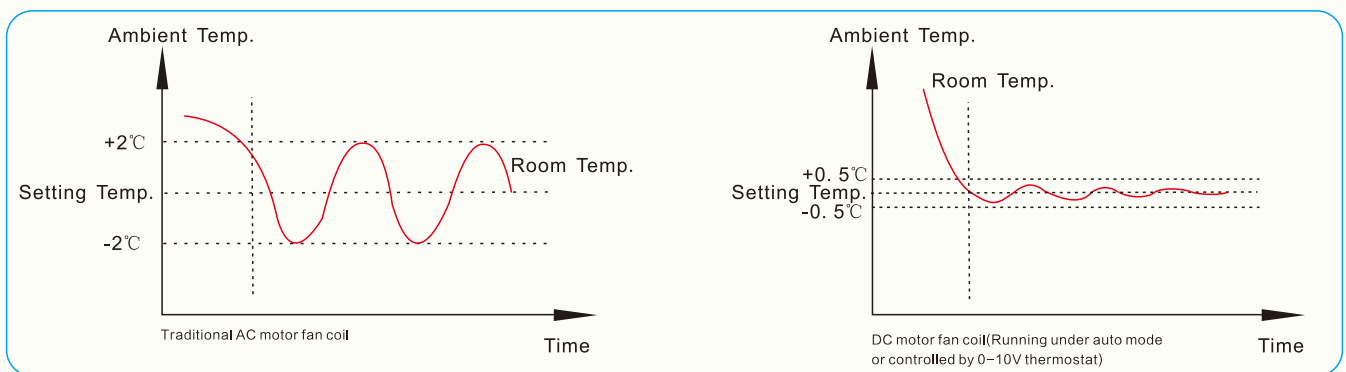

DC fan coil product range





TAIZHOU MECO REFRIGERATION EQUIPMENT CO.,LTD.

Add: No.2018 Haicheng Road,Jiaojiang District,Taizhou ,Zhejiang

 0576-82424800/82517780

 info@china-meco.com

 www.china-meco.com



ISO9001